

---

# HP OmniBook Sojourn



---

## Troubleshooting Guide

Thank you for purchasing this Factory Service Manual CD/DVD from servicemanuals4u.com.

Please check out our eBay auctions for more great deals on Factory Service Manuals:

[servicemanuals4u](http://servicemanuals4u.com)

## Notice

In a continuing effort to improve the quality of our products, technical and environmental information in this document is subject to change without notice.

This manual and any examples contained herein are provided “as is” and are subject to change without notice. Hewlett-Packard Company makes no warranty of any kind with regard to this manual, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Hewlett-Packard Co. shall not be liable for any errors or for incidental or consequential damages in connection with the furnishing, performance, or use of this manual or the examples herein.

Consumer transactions in Australia and the United Kingdom: The above disclaimers and limitations shall not apply to Consumer transactions in Australia and the United Kingdom and shall not affect the statutory rights of Consumers.

© Copyright Hewlett-Packard Company 1998. All rights reserved. Reproduction, adaptation, or translation of this manual is prohibited without prior written permission of Hewlett-Packard Company, except as allowed under the copyright laws.

The programs that control this product are copyrighted and all rights are reserved. Reproduction, adaptation, or translation of those programs without prior written permission of Hewlett-Packard Co. is also prohibited.

Portions of the programs that control this product may also be copyrighted by Microsoft Corporation, Phoenix Technologies, Ltd., NeoMagic, Inc., and American Megatrend, Inc. See the individual programs for additional copyright notices.

Microsoft, MS, MS-DOS, and Windows are registered trademarks of Microsoft Corporation. Pentium and the Intel Inside logo are U.S. registered trademarks and MMX is a U.S. trademark of Intel Corporation.

All certifications may not be completed at product introduction. Check with your HP reseller for certification status.

This equipment is subject to FCC rules. It will comply with the appropriate FCC rules before final delivery to the buyer.

Hewlett-Packard Company  
Mobile Computing Division  
19310 Pruneridge Ave.  
Cupertino, CA 95014, U.S.A.

## Edition History

Edition 1 ..... April 1998

---

# Contents

|                                                         |            |
|---------------------------------------------------------|------------|
| <b>Product Information</b> . . . . .                    | <b>1-1</b> |
| Features and Operation . . . . .                        | 1-1        |
| Power Modes . . . . .                                   | 1-4        |
| To select a power management profile . . . . .          | 1-5        |
| Checking the Status of the OmniBook . . . . .           | 1-6        |
| Using Function Keys . . . . .                           | 1-6        |
| Resetting the OmniBook . . . . .                        | 1-7        |
| System Resources . . . . .                              | 1-8        |
| Specifications . . . . .                                | 1-10       |
| <b>Battery Replacement</b> . . . . .                    | <b>2-1</b> |
| Before you start removing the battery . . . . .         | 2-1        |
| To replace the battery . . . . .                        | 2-2        |
| To optimize battery performance . . . . .               | 2-6        |
| Battery Safety . . . . .                                | 2-6        |
| <b>Troubleshooting and Diagnostics</b> . . . . .        | <b>3-1</b> |
| Troubleshooting . . . . .                               | 3-3        |
| Troubleshooting the Problem . . . . .                   | 3-4        |
| Using Diagnostic Tools . . . . .                        | 3-12       |
| Power-On Self-Test . . . . .                            | 3-13       |
| OmniBook Diagnostic Program . . . . .                   | 3-16       |
| BIOS Setup Utility . . . . .                            | 3-27       |
| To change the keyboard layout . . . . .                 | 3-29       |
| <b>Reference Information</b> . . . . .                  | <b>4-1</b> |
| Password Removal Policy . . . . .                       | 4-1        |
| Hewlett-Packard TFT Display Quality Statement . . . . . | 4-2        |
| OmniBook Sojourn Replaceable Parts . . . . .            | 4-4        |

## Figures

|                                                                        |      |
|------------------------------------------------------------------------|------|
| Figure 1-1. OmniBook - Front View . . . . .                            | 1-1  |
| Figure 1-2. OmniBook - Back View . . . . .                             | 1-2  |
| Figure 1-3. Multimedia Slice - Back View . . . . .                     | 1-2  |
| Figure 1-4. OmniBook - Audio Features . . . . .                        | 1-2  |
| Figure 3-1. Basic Troubleshooting Steps . . . . .                      | 3-3  |
| Figure 3-2. OmniBook Diagnostic Screens — Basic and Advanced . . . . . | 3-16 |
| Figure 3-3. Serial and Parallel Loopback Connectors . . . . .          | 3-18 |

## Tables

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| Table 1-1. Summary of Features . . . . .                                 | 1-3  |
| Table 1-2. Activating Power Modes . . . . .                              | 1-4  |
| Table 1-3. Power Mode Descriptions . . . . .                             | 1-5  |
| Table 1-4. Default Power Management Profiles . . . . .                   | 1-5  |
| Table 1-5. Status Light Indicators . . . . .                             | 1-6  |
| Table 1-6. Function Keys . . . . .                                       | 1-6  |
| Table 1-7. System Interrupts . . . . .                                   | 1-8  |
| Table 1-8. System Memory . . . . .                                       | 1-8  |
| Table 1-9. System Input/Output Addresses (100-3FF) . . . . .             | 1-9  |
| Table 1-10. DMA Channels . . . . .                                       | 1-9  |
| Table 1-11. OmniBook Sojourn specifications . . . . .                    | 1-10 |
| Table 1-12 Multimedia slice specifications . . . . .                     | 1-11 |
| Table 1-13 Battery slice specifications . . . . .                        | 1-11 |
|                                                                          |      |
| Table 3-1. Troubleshooting Suggestions . . . . .                         | 3-5  |
| Table 3-2. Scope of Diagnostic Tools . . . . .                           | 3-12 |
| Table 3-3 POST Terminal-Error Beep Codes . . . . .                       | 3-13 |
| Table 3-4 POST Messages . . . . .                                        | 3-13 |
| Table 3-5. OmniBook Diagnostic Error Codes . . . . .                     | 3-19 |
| Table 3-6. BIOS Setup Menus and Parameters . . . . .                     | 3-27 |
|                                                                          |      |
| Table 4-1. OmniBook Sojourn TFT XGA Display Quality Guidelines . . . . . | 4-3  |
| Table 4-2. OmniBook Sojourn Replaceable Parts List . . . . .             | 4-4  |

## Introduction

This troubleshooting manual provides reference information for the HP OmniBook Sojourn. It is intended to be used by HP-authorized service personnel in the installation, configuration, and troubleshooting of these products.

The manual is designed as a self-paced guide. It is intended to train you to install, configure, and troubleshoot OmniBook computers. You can follow this manual without having equipment available.

The following table lists additional places where you can get supplementary information about OmniBook products.

**Sources of OmniBook Information**

| Source                                                               | Address or Number                                                                                                                                                    | Comments                                                            |
|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| HP External Web                                                      | <a href="http://www.hp.com/omnibook">http://www.hp.com/omnibook</a><br>( <a href="http://www2.hp.com/omnibook">http://www2.hp.com/omnibook</a> ,<br>European mirror) | No usage restriction.                                               |
| HP US Reseller Web                                                   | <a href="http://partner.americas.hp.com">http://partner.americas.hp.com</a>                                                                                          | Restricted to Authorized Resellers only.                            |
| HP Asia Pacific Channel<br>Support Centre for DPSP<br>Partners       | <a href="http://www.hp.com.au">http://www.hp.com.au</a>                                                                                                              | Restricted to DPSP Partners only.                                   |
| America Online                                                       | Keyword: HP                                                                                                                                                          | Call (800) 827-6364 for membership<br>within the US.                |
| CompuServe*                                                          | GO HP                                                                                                                                                                | Call (800) 524-3388 for membership<br>within the US.                |
| HP Bulletin Board Service                                            |                                                                                                                                                                      | Refer to the latest Product Support Plan<br>for non-US BBS numbers. |
| HP First (automated fax)                                             | (800) 333-1917                                                                                                                                                       | US and Canada.                                                      |
|                                                                      | (801) 344-4809                                                                                                                                                       | Outside US and Canada.                                              |
|                                                                      | (800) 544-9976                                                                                                                                                       | Reseller support number (enter outlet id<br>number).                |
| HP Support Assist CD-ROM                                             | (800) 457-1762                                                                                                                                                       | US and Canada.                                                      |
|                                                                      | (801) 431-1587                                                                                                                                                       | Outside US and Canada.                                              |
| * Baud rates = 300-28,800; Parity = E; Data bits = 7; Stop bits = 1. |                                                                                                                                                                      |                                                                     |



## Product Information

---


The HP OmniBook Sojourn is HP's thinnest, most sophisticated high-performance notebook PC for senior managers, executives, and key professionals. It is ultraportable (3.2 lb and .71 inch thick), and uses a 233-MHz mobile Pentium processor and 12.1-inch TFT display. This chapter describes:

- Features and operation (below).
- Specifications (page 1-10).

---


## Features and Operation

The following illustrations point out the main external features of the OmniBook Sojourn, multimedia slice.

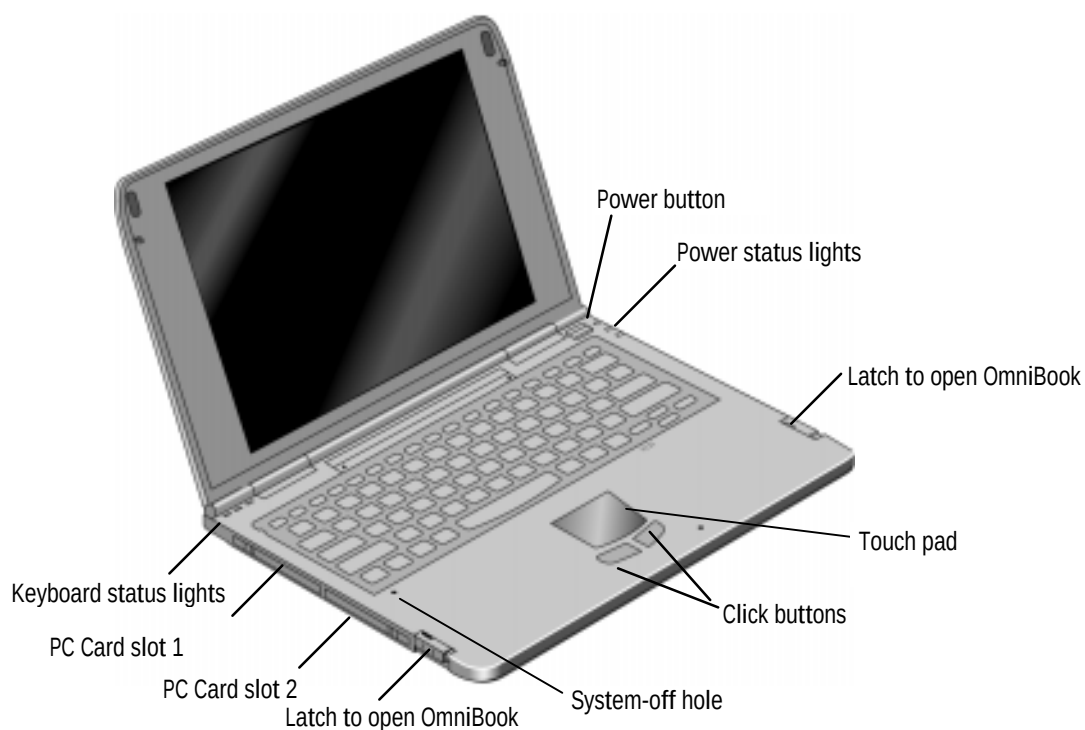


**Figure 1-1. OmniBook - Front View**




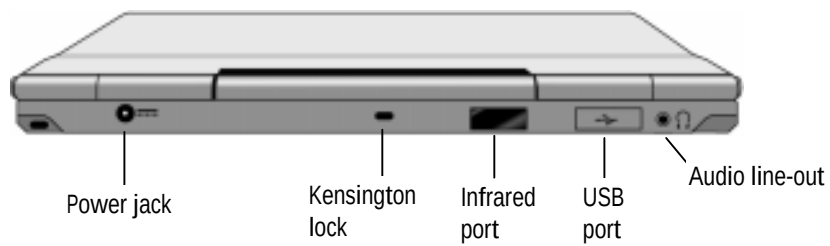

**Figure 1-2. OmniBook - Back View**

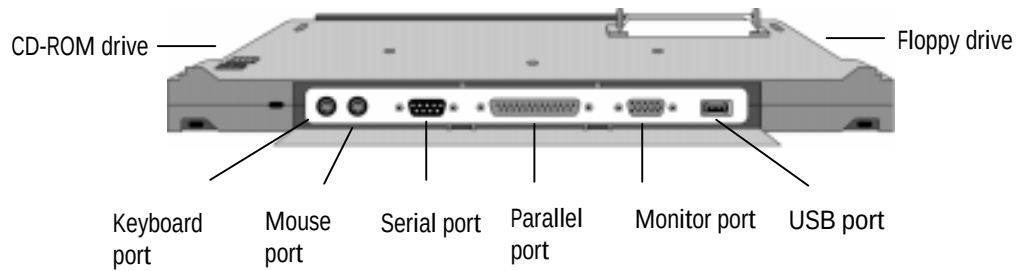

**Figure 1-3. Multimedia Slice - Back View**

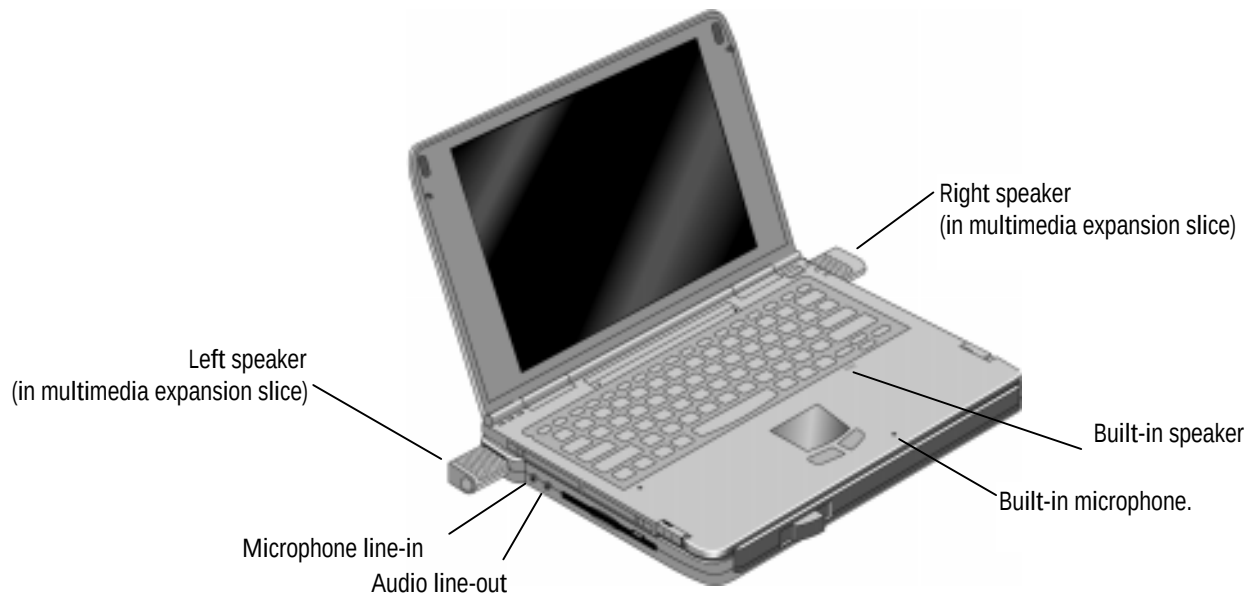

**Figure 1-4. OmniBook - Audio Features**

**Table 1-1. Summary of Features**

|                                |                                                                                                                                                                              |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor and Bus Architecture | 233-MHz Intel Pentium Processor with MMX technology.<br>Intel's sub-2V low-power processor.<br>256-KB pipeline burst SRAM L2 cache.<br>Intel 430MX Mobile Triton II chipset. |
| Memory                         | 64-MB RAM, fixed; no extended memory slot.                                                                                                                                   |
| Display                        | 12.1-inch SVGA TFT (up to 800 x 600 x 64K colors).                                                                                                                           |
| Video                          | 128-bit graphics controller with 9Mbit video RAM.<br>Zoomed Video enabled.                                                                                                   |
| PC Card                        | Two side-by-side Type II 16-/32-bit PC Card slots.                                                                                                                           |
|                                | CardBus enabled.                                                                                                                                                             |
| Operating System               | Windows 95 pre-installed.                                                                                                                                                    |
| Power States                   | On, Standby, Suspend to Disk, Suspend to RAM, Off                                                                                                                            |

## Power Modes

**Table 1-2. Activating Power Modes**

| Power Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | To Enter Mode                                                                                                                                                                                        | Comments                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Press the Power button to turn the OmniBook on.                                                                                                                                                      |                                                                                                                                                                                                        |
| Standby                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Allow the time-out to expire without activity, but only if you have enabled the Standby time-out in Setup (normally disabled).<br>–or–<br>Click the Standby icon on the PowerPanel toolbar.          | Press any key or move the mouse pointer to exit Standby mode.                                                                                                                                          |
| Suspend to RAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Press the power button while the OmniBook is on. <sup>1</sup><br>–or–<br>From the Start menu, click Suspend. <sup>2</sup><br>–or–<br>Click the “System Suspend” icon on the PowerPanel toolbar.      | Press the power button to restore the session. The session resumes immediately                                                                                                                         |
| Save to Disk                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Press the power button while the OmniBook is on. <sup>3</sup><br>–or–<br>From the Start menu, click Suspend. <sup>4</sup><br>–or–<br>Click the “System Save To Disk” icon on the PowerPanel toolbar. | Allow the time-out to expire without activity, but only if you have enabled the Standby time-out in Setup (normally disabled).<br>–or–<br>Press the Standby icon on the PowerPanel toolbar.            |
| Off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | From the Start menu, click Shut Down. Unsaved data will be lost. The OmniBook will reboot when you turn it back on.<br>–or–<br>Press the power button. <sup>5</sup>                                  | Press the power button while the OmniBook is on. <sup>1</sup><br>–or–<br>From the Start menu, click Suspend. <sup>2</sup><br>–or–<br>Press the “System Suspend to RAM” icon on the PowerPanel toolbar. |
| <sup>1</sup> Requires following configuration: Switch Button set to “Suspend/Resume,” Suspend Mode set to “Suspend to RAM.”<br><sup>2</sup> Requires following configuration: Suspend Mode set to “Suspend to RAM.”<br><sup>3</sup> Requires following configuration: Switch Button set to “Suspend/Resume.” Suspend Mode set to “Save To Disk.”<br><sup>4</sup> Requires following configuration: Suspend Mode set to “Save To Disk.”<br><sup>5</sup> Requires following configuration: Switch Button set to “On/Off.”<br>See the instructions on page 3-27 to configure the Switch (Power) button and Suspend mode. |                                                                                                                                                                                                      |                                                                                                                                                                                                        |

**Table 1-3. Power Mode Descriptions**

| Power Mode                                                                                                                                                                                                                                                                                                    | Description*                                                                                                                                             | Required Setup Settings                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Standby                                                                                                                                                                                                                                                                                                       | Turns off the display only.<br>Maintains network connections.<br>Restarts quickly ("Instant On").                                                        | None                                                                                                 |
| Suspend to RAM                                                                                                                                                                                                                                                                                                | Turns off the display.<br>Saves current session in RAM.<br>Saves significant power.<br>Loses network connections. **<br>Restarts quickly ("Instant On"). | Power menu<br>Switch Button: Suspend/Resume<br>Suspend Mode: Suspend to RAM                          |
| Save to Disk                                                                                                                                                                                                                                                                                                  | Saves maximum power.<br>Saves current session on hard disk.<br>Loses network connections                                                                 | Power menu<br>Switch Button: Suspend/Resume<br>Suspend Mode: Save-To-Disk                            |
| Off                                                                                                                                                                                                                                                                                                           | Saves maximum power.<br>Loses network connections.<br>Resets everything at startup.<br>Starts a new session at startup.                                  | For using Start, Shut Down, none.<br>For using the Power button, Power menu<br>Switch Button: On/Off |
| <p>* If the ac adapter is connected, the OmniBook battery continues to charge in any mode.</p> <p>** Windows 95 can restore the network connections when you turn on the OmniBook. For a different operating system, you may have to reboot the OmniBook or restart the operating system to restore them.</p> |                                                                                                                                                          |                                                                                                      |

## To select a power management profile

PowerPanel provides a group of predefined profiles that you can select according to the type of work you are doing on the OmniBook. The following table describes the PowerPanel profiles.

For complete documentation about PowerPanel features, download the Phoenix *User's Guide* from: <http://www.phoenix.com/notebook/ppanel.html> or see the PowerPanel online Help (right-click on the PowerPanel toolbar, then click PowerPanel Help Topics).

**Table 1-4. Default Power Management Profiles**

| Default Power Management Profiles                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC.</b> Turns off video and hard disk drive after a predetermined period of time, but doesn't initiate automatic Suspend to RAM or Save to Disk modes. |
| <b>Maximum Performance.</b> Sets power saving features to give you the best system performance while still conserving power.                              |
| <b>Maximum Battery Life.</b> Sets power saving features to give you the maximum battery life and good performance.                                        |

## Checking the Status of the OmniBook

The OmniBook contains three status lights to the right of the keyboard and three status lights to the upper left of the keyboard. The lights to the right show power status, battery status and drive activity. The lights to the left show Caps lock, Num lock, and Scroll lock.

**Table 1-5. Status Light Indicators**

| Indicator                                                                           | Meaning                                                                                            |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|    | <b>Power</b><br>Green when power is on.<br>Orange when OmniBook is suspended (to RAM).             |
|    | <b>Battery power</b><br>Green when battery is completely charged. Orange when battery is charging. |
|    | <b>Drive activity</b><br>The OmniBook is accessing the built-in hard disk drive.                   |
|    | <b>Caps lock</b><br>Caps Lock is active.                                                           |
|    | <b>Num lock</b><br>Num Lock is active.                                                             |
|  | <b>Scroll lock</b><br>Scroll Lock is active.                                                       |

## Using Function Keys

The keys labeled F1 through F12 on the top row of the keyboard provide shortcut key sequences for various system controls. The OmniBook keyboard shows the Fn hot keys labeled in orange.


The following table provides a list and description of the OmniBook Fn key combinations.

**Table 1-6. Function Keys**

| Hot Keys         | Effect                                     |
|------------------|--------------------------------------------|
| Fn + F8          | Decreases the display's brightness.        |
| Fn + F9          | Increases the display's brightness.        |
| Fn + F10         | Toggles the speaker on and off (Mute key). |
| Fn + NL/SL       | Toggles Scroll Lock on and off.            |
| Fn + Up Arrow    | Moves up one page.                         |
| Fn + Down Arrow  | Moves down one page                        |
| Fn + Right Arrow | Moves to bottom of a file.                 |
| Fn + Left Arrow  | Moves to top of a file.                    |

## Resetting the OmniBook

1. Insert a straightened paper clip into the system off hole near the Fn key, as shown.
2. After the OmniBook shuts down, press the Power button to turn it on.

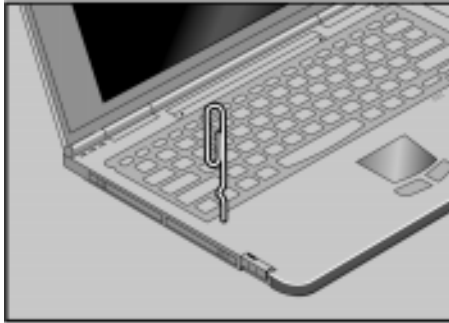

### Note

The OmniBook can boot from a CD under the following conditions:

- If you have the OmniBook docked to a multimedia slice\*, and
- If the boot order is defined in the Book Options section of the BIOS Setup with the CD-ROM drive before the hard drive,
- If you have a bootable CD in the drive, such as the OmniBook Recovery CD.

\*Boot from a CD-ROM is supported only from the built-in CD-ROM in the multimedia slice.

## System Resources

Below are default values for system resources. To see other, non-default possibilities, use the BIOS Setup utility (see “BIOS Setup Utility” on page 3-26).

The tables in this section show typical resource usage as set up by the OmniBook BIOS. Plug-and-play operating systems, drivers, and BIOS Setup settings may change some of the entries.

**Table 1-7. System Interrupts**

| System Interrupts | OmniBook only                                                                        | OmniBook with Multimedia Slice                   |
|-------------------|--------------------------------------------------------------------------------------|--------------------------------------------------|
| 0                 | System timer                                                                         | System timer                                     |
| 1                 | Keyboard                                                                             | Keyboard                                         |
| 2                 | Cascade to IRQ 9                                                                     | Cascade to IRQ 9                                 |
| 3                 | COM2 serial port B port (Infrared)<br>Free if Infrared disabled in BIOS.             | COM2 serial port B port (Infrared)               |
| 4                 | COM1                                                                                 | COM1                                             |
| 5                 | ESS1879                                                                              | ESS1879                                          |
| 6                 | Floppy drive controller                                                              | Floppy drive controller                          |
| 7                 | LPT1                                                                                 | LPT1                                             |
| 8                 | Real-time clock                                                                      | Real-time clock                                  |
| 9                 | PCI devices                                                                          | CardBus controller                               |
| 10                | Free                                                                                 | Free                                             |
| 11                | Free                                                                                 | Free                                             |
| 12                | Touch pad                                                                            | Touch pad                                        |
| 13                | Numeric data processor                                                               | Numeric data processor                           |
| 14                | Internal hard disk (primary IDE controller)                                          | Internal hard disk (primary IDE controller)      |
| 15                | Internal CD-ROM drive (secondary IDE controller) - disabled if OmniBook is undocked. | Internal CD-ROM drive (secondary IDE controller) |

**Table 1-8. System Memory**

| System Memory Addresses | OmniBook only      | OmniBook with Multimedia Slice |
|-------------------------|--------------------|--------------------------------|
| 00000 - 9FFFF           | System memory      | System memory                  |
| A0000 - BFFFF           | Video              | Video                          |
| C0000 - CBFFF           | Video BIOS         | Video BIOS                     |
| CC000 - CCFFF           | CardBus controller | CardBus controller             |
| CD000 - DFFFF           | Free (see below)   | Free (see below)               |
| E0000 - FFFFF           | System BIOS        | System BIOS                    |

Valid uses for memory addresses CD000-DFFFF:

- Upper memory blocks (UMBs).
- PC Card memory windows.

**Table 1-9. System Input/Output Addresses (100-3FF)**

| <b>Address</b>         | <b>OmniBook only</b>                | <b>OmniBook with Multimedia Slice</b> |
|------------------------|-------------------------------------|---------------------------------------|
| 0170-0177              | Secondary IDE controller            | Secondary IDE controller (CD-ROM)     |
| 01F0-01F7              | Primary IDE controller              | Internal hard disk                    |
| 0220-022F              | ESS1879 sound chip                  | ESS1879 sound chip                    |
| 0376                   | Secondary IDE controller (disabled) | Secondary IDE controller (CD-ROM)     |
| 0378-037F              | LPT1                                | LPT1 (printer port)                   |
| 0330-0331<br>0338-038B | ESS1879 sound chip                  | ESS1879 sound chip                    |
| 03B0-03BB              | VGA adapter                         | VGA adapter                           |
| 03C0-03DF              | VGA adapter                         | VGA adapter                           |
| 03F0-03F5              | Floppy controller                   | Floppy controller                     |
| 03F6                   | Primary IDE controller              | Primary IDE controller                |
| 03F7                   | Floppy controller                   | Floppy controller                     |
| 03F8-03FF              | COM1                                | COM1                                  |
| 0900-0907              | ES 1879 control interface           | ES 1879 control interface             |
| 1000-101F              | USB controller                      | USB controller                        |

**Table 1-10. DMA Channels**

| <b>DMA Channel</b> | <b>OmniBook only</b> | <b>OmniBook with Multimedia Slice</b> |
|--------------------|----------------------|---------------------------------------|
| 0                  | Free                 | Free                                  |
| 1                  | ESS1879              | ESS1879                               |
| 2                  | Floppy drive         | Floppy drive                          |
| 3                  | ESS1879              | ESS1879                               |
| 4                  | DMA controller       | DMA controller                        |
| 5                  | Free                 | Free                                  |
| 6                  | Free                 | Free                                  |
| 7                  | Free                 | Free                                  |



---

# Specifications

This section describes hardware specification for the

- OmniBook Sojourn.
- OmniBook multimedia slice.
- OmniBook battery slice (double and quadruple).

**Table 1-11. OmniBook Sojourn specifications**

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Physical Attributes</b>            | Size: 29.69 x 21.79 x 1.8 cm closed (11.69 x 8.58 x 0.71 inches).<br>Weight: 1.45 kg (3.2 lb).                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Processor and Bus Architecture</b> | 233-MHz Intel Pentium Processor* with MMX technology.<br>Intel's sub-2V low-power processor.<br>256-KB pipeline burst SRAM L2 cache.<br>Intel 430MX Mobile Triton II chipset.                                                                                                                                                                                                                                                                                                               |
| <b>Graphics</b>                       | 12.1-inch SVGA TFT (up to 800 x 600 x 64K colors).<br>128-bit graphics controller;<br>2-MB video RAM<br>Zoomed Video enabled (back slot)                                                                                                                                                                                                                                                                                                                                                    |
| <b>Power</b>                          | Rechargeable lithium-ion battery; uses SMBus to manage power system.<br>Battery recharges in 3 hrs while PC is off and 10 hrs while PC is on.<br>Low-battery warning.<br>Suspend/resume.<br>Typical battery life with power management on: up to 1.5 hrs.<br>Optional battery slices approximately quadruple typical battery life.<br>ac adapter 100 to 240 Vac (50 to 60 Hz) input; 14 Vdc, 3.0 A output.                                                                                  |
| <b>Mass Storage</b>                   | 2.1-GB non-removable hard drive.<br>Included multimedia slice adds 3.5" 1.44-MB floppy drive (3-mode) and 24X (maximum) CD-ROM drive.                                                                                                                                                                                                                                                                                                                                                       |
| <b>RAM</b>                            | 64-MB RAM, fixed; no extended memory slot.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Audio System</b>                   | 16-bit; Sound Blaster Pro-compatible.<br>Integrated monaural speaker.<br>Headphone-out mini-jack port.<br>Included multimedia slice adds line-in, line-out, and two stereo speakers.                                                                                                                                                                                                                                                                                                        |
| <b>Keyboard and Pointing Device</b>   | 82-key full-size QWERTY keyboard.<br>Thin-hinge technology.<br>Embedded numeric keypad.<br>12 function [Fn] keys.<br>Touch pad.                                                                                                                                                                                                                                                                                                                                                             |
| <b>Input/Output and Expandability</b> | Universal serial bus (USB).<br>Two side-by-side Type II 16-/32-bit PC Card slots; CardBus enabled.<br>4-Mbps IrDA-compliant infrared.<br>Included multimedia slice adds 9-pin 115,200-bps serial port, 25-pin bidirectional ECP/EPP parallel port, video-out port, second USB port, PS/2 keyboard port, PS/2 mouse port, and audio ports.<br>Multimedia slice video-out supports 800 x 600 x 64K colors at up to 85-Hz refresh rate or 1024 x 768 x 256 colors at up to 75-Hz refresh rate. |

**Table 1-11 OmniBook Sojourn specifications (Continued)**

|                              |                                                                                                                                                                |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Preinstalled Software</b> | Microsoft® Windows® 95 operating system.<br>Advanced Power Management (APM 1.2).<br>McAfee VirusScan<br>Phoenix Power Panel.                                   |
| <b>Environmental Limits</b>  | Operating temperature: 5 to 35 °C (41 to 95 °F).<br>Operating humidity: 20 to 90 percent RH (5 to 35 °C).<br>Storage temperature: -20 to 50 °C (-4 to 122 °F). |

**Table 1-12 Multimedia slice specifications**

|                          |                                               |
|--------------------------|-----------------------------------------------|
| <b>Model</b>             | HP F1431A.                                    |
| <b>Docking</b>           | Warm dock (attaching or removing in Suspend). |
| <b>Floppy Disk Drive</b> | 3 mode 3.5-inch (1.44MB/1.2MB/720KB).         |
| <b>CD-ROM</b>            | 24x CD-ROM drive.                             |
| <b>Sound</b>             | Built-in stereo speakers.                     |
| <b>Power Supply</b>      | Supplied from the main unit.                  |
| <b>Security</b>          | Kensington Microsaver lock slot.              |
| <b>Weight</b>            | Approximately 1.2 Kg.                         |

**Table 1-13 Battery slice specifications**

|                                |                                                                  |
|--------------------------------|------------------------------------------------------------------|
| <b>Model</b>                   | F1433A                                                           |
| <b>Capacity/Output Voltage</b> | 5.220mAh/ 10.8V                                                  |
| <b>Battery Operation</b>       | Approximately 5.4 hours<br>(7.2 hours with the built-in battery) |
| <b>Time to charge</b>          | Approximately 5 hours                                            |
| <b>Weight</b>                  | Approximately 1.0Kg                                              |



## Battery Replacement

---

**NOTE**

The removal and installation of the internal battery should be performed by a qualified technician, such as your local IT or technical support technician. If you have questions that your local technical support cannot answer, contact your HP reseller. See the *Support and Service* booklet supplied with your OmniBook for additional contact information.

**Caution**

Battery may explode if incorrectly replaced. Replace only with the same type of battery supplied with your OmniBook (HP replacement part number F1432-69001). Dispose of used battery properly. Refer to the Battery Safety section of this document for disposal instructions.

---

### Before you start removing the battery

1. **Important:** Save your work.
2. From the Start menu, shut down the OmniBook.
3. Disconnect the ac adapter from the OmniBook.
4. Completely discharge the installed battery. To discharge the battery, unplug the ac adapter and leave the OmniBook on until it shuts itself off and you can no longer turn it back on.


---

## To replace the battery

### WARNING

Do not allow a metal object to touch the battery contacts. This could cause fire, burns, or electrical shock.

1. Open the OmniBook.

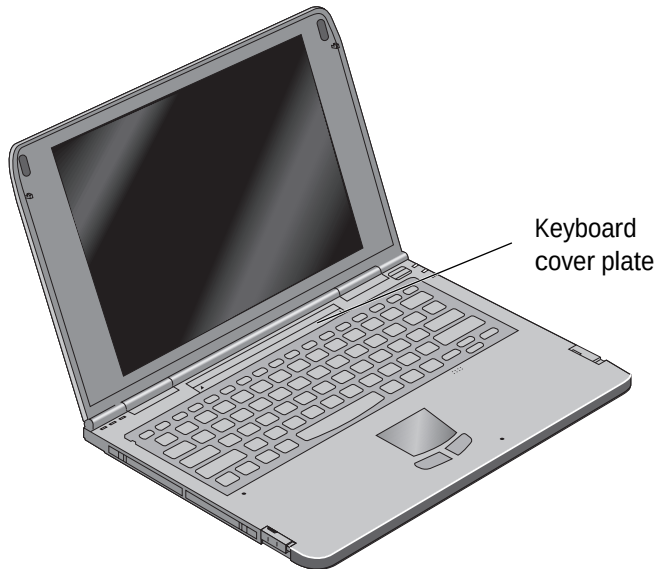

2. Carefully slide the keyboard cover plate toward the display (LCD) panel.


Note: The cover plate is hard to slide.



3. Lift the center of the back (side closest to the display) of the keyboard and gently bow the keyboard until the small catches on both sides of the keyboard are free.




4. Carefully fold the keyboard forward toward the front of the OmniBook and lay it on the OmniBook palm rest, taking care not to pull or stress the keyboard's flex cables.

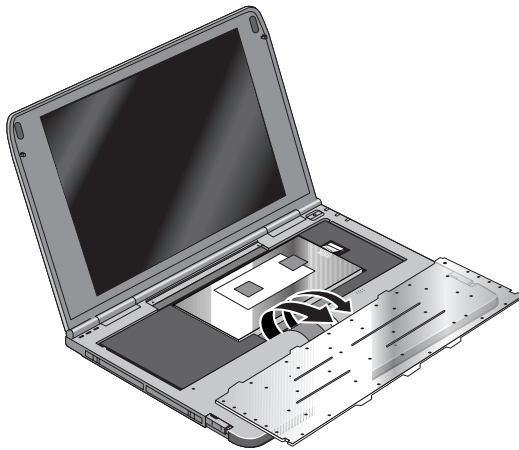

5. Pull out the battery cable from the connector.

**CAUTION:** Do not use any other metal objects to remove the cable from the connector.

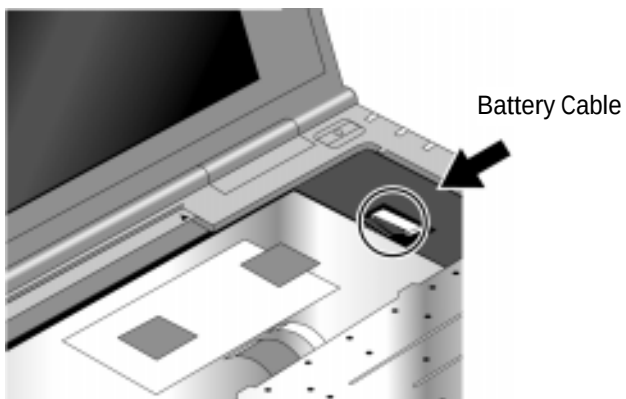

6. Remove the battery by sliding it toward the front of the OmniBook and lifting it out.



7. Insert the new battery into the OmniBook, making sure that the battery is seated flat against the bottom of the case.
8. Reconnect the battery cable.

9. Insert the four tabs on the front of the keyboard into the slots in the cover assembly.



10. Press the rear of the keyboard into place, making sure that the small catches on each side of the OmniBook are engaged.



11. Slide the keyboard cover plate forward toward the front of the OmniBook.  
You have completed installing the battery.



---

## To optimize battery performance

### CAUTION

Use only the HP F1434A adapter. Using another adapter could damage your OmniBook and void the warranty

- Fully charge and discharge a new battery 2 to 4 times:
  1. Connect the ac adapter and charge the battery to full capacity.
  2. Discharge the battery by unplugging the ac adapter and leaving the OmniBook turned on until the OmniBook shuts off.
- Do not leave batteries unused for long periods of time.
- Unplug your ac adapter when the OmniBook is not in use.

---

## Battery Safety

- To avoid risk of fire, burns, or damage to your battery, do not allow a metal object to touch the battery contacts, which could cause shorting.
- These batteries are suitable for use only with the HP OmniBook Sojourn. Check the *Support and Service* booklet for your local HP contact.
- Do not let a battery get moist or wet, which could cause shorting.
- Do not disassemble the battery. There are no serviceable parts inside.
- Handle a damaged or leaking battery with extreme care. If you come in contact with the electrolyte, wash the exposed area with soap and water. If it contacts the eye, flush the eye with water for 15 minutes and seek medical attention.
- When discarding a battery, contact your local waste disposal provider regarding local restrictions on the disposal or recycling of batteries. Cover the exposed battery terminals with electrician's tape before disposing of the battery. Do not dispose of a battery in fire or water.
- To obtain a replacement battery, contact your local dealer or HP sales office.
- Do not expose the battery to temperatures above 60 °C (140 °F) or below -20 °C (-4 °F).
- Do not use the battery in ambient temperatures above 35 °C (95 °F) or below 5 °C (41 °F). Do not use it in direct sunlight, near a heating source, or in relative humidity above 80% or below 20%.

## Troubleshooting and Diagnostics

---

This chapter includes diagnostic and troubleshooting information for testing the functionality of the OmniBook and identifying faulty modules. Note that the only replaceable module in the OmniBook unit is the internal battery. If the problem is caused by any other hardware failure, the faulty OmniBook will be exchanged for another unit.

**Note**

If the OmniBook Sojourn must be exchanged, it is the responsibility of the customer to back up any applications and data on the OmniBook's hard disk prior to exchange. The user should back up system data regularly. Refer to your lease and service agreements for information on service programs.

### Troubleshooting

“Troubleshooting the Problem” on page 3-4 provides a suggested overall approach to troubleshooting problems with the OmniBook and a table of possible solutions to problems. You should use this table to fix problems not related to hardware failures and to verify that problems are caused by hardware failures before exchanging the unit. The OmniBook hardware diagnostic program will detect almost all hardware problems. If you suspect a hardware problem, you should run this program.

### Diagnostic Tools

**Note**

Before arranging an exchange of the OmniBook Sojourn, try to verify that the problem in a hardware failure using the available diagnostic tools such as the OmniBook hardware diagnostic program or other diagnostic tools described in this section.


- **OmniBook hardware diagnostic program** (see “OmniBook Diagnostic Program” on page 3-16).
  - The OmniBook hardware diagnostic program provides two levels of testing:
    - User-level testing using the basic hardware test.
    - Advanced testing using the individual hardware tests.
  - The tests are designed to run after the system reboots. This ensures that the OmniBook will be in a predictable state, so the diagnostic program can properly test the hardware components. The tests are intended to preserve the state of the OmniBook. The OmniBook reboots when you exit the program so that you can return to your operating environment. .

- **Power-on self-test** (see “Power-On Self-Test” on page 3-13).
  - The Power-On Self-Test (POST) is a series of initialization routines and diagnostic tests that the system BIOS runs when the OmniBook boots. If the POST detects an error, the system will display an error message on the screen. The system BIOS will not boot the operating system if the system memory, CPU, DMA controller, or interrupt controller fails the POST diagnostic tests.
- **BIOS Setup Utility** (See “BIOS Setup Utility” on page 3-13)
  - The BIOS Setup utility provides access to basic configuration settings. It is independent of the operating system.

---

# Troubleshooting

The suggestions in this section can help isolate and repair the cause of a problem. To ensure quality repair, HP recommends that you follow the basic troubleshooting steps shown in the illustration below.

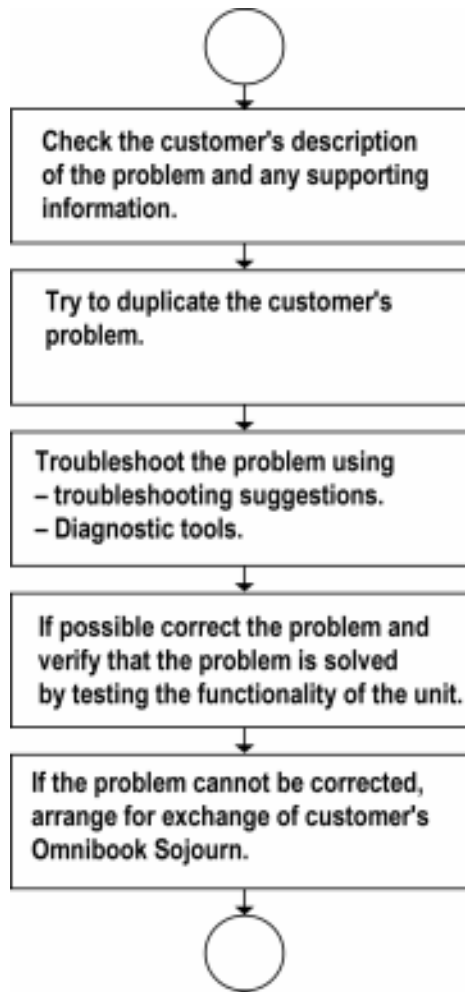

**Figure 3-1. Basic Troubleshooting Steps**

## Troubleshooting the Problem

### Record pertinent information about the unit:

- Model and serial number.
- Operating system and version.
- BIOS version.
- Accessories and peripherals used.

### Analyze the problem:

- **Observe Symptoms.** Using the customer's information, try to duplicate the problem. Determine how the problem differs from proper behavior. Also, take note of the functions that do work properly.
- **Separate Problems.** If there is more than one symptom, separate them into distinct problems.
- **Consider Causes.** Keep in mind possible causes for each problem, such as the ones listed in the tables below. Use the diagnostic tools to help find possible causes and repair the problem.  
"Table 3-1. Troubleshooting Suggestions" on page 3-5 lists general guidelines for actions to take with certain failure symptoms. The suggested order of investigation is not mandatory.

### Verify the cause of the problem

If possible, run the OmniBook diagnostic program. The OmniBook diagnostic program will detect most hardware problems.

#### Caution

The basic system test is non-destructive to data on your OmniBook. Some advanced tests may affect data your OmniBook. Make sure you have backed up your hard disk drive before running the advanced tests. Users should back up their data and applications regularly and prior to any testing.

Before arranging to exchange the OmniBook, verify that the problem is a hardware failure.

- Run the System Test in the OmniBook Diagnostic program.  
–and–
- Run the Test in the OmniBook Diagnostic program that checks the repaired function.  
–and–
- Run any other tests that failed during troubleshooting.

**Table 3-1. Troubleshooting Suggestions**

| Symptom                                                          | Action                                                                                                                                                      | Comment                                                                                                                                                                                                                      |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Startup</b>                                                   |                                                                                                                                                             |                                                                                                                                                                                                                              |
| The system's power fails to turn on.                             | Check whether the ac adapter is plugged in correctly.<br>If the system is operating from the internal battery, check whether the battery is fully charged.  | Connect the ac adapter plug correctly.<br>The system's power cannot be turned on if the battery is fully exhausted or discharged. Connect the ac adapter to the unit to supply power to the system and recharge the battery. |
| System does not boot.                                            | Try rebooting from floppy drive.<br>You need to connect the OmniBook with the multimedia slice to do this.                                                  | If the OmniBook boots from floppy drive, check boot disk setting in BIOS. See "BIOS Setup Utility" on page 3-26.<br>Reload hard drive from recovery CD-ROM.<br>Contact Hewlett-Packard.                                      |
| Does not boot on ac or battery, no display.                      | Check the power source.<br>Check the ac adapter.<br>Push system-off button.<br>Try rebooting from floppy drive.                                             | If the OmniBook boots from floppy drive, reprogram BIOS. See "BIOS Setup Utility" on page 3-26.<br>Run OmniBook hardware diagnostic program. See "OmniBook Diagnostic Program" on page 3-16.<br>Reload hard drive            |
| Does not boot on battery (boots on ac)                           | Check battery level on status panel and battery LEDs.<br>Recharge the battery properly according to "To recharge the internal battery" in the user's guide. | Make sure the room temperature is within the operating temperature specification for the OmniBook and charge the battery for at least 10 hours.<br>If battery will not recharge, battery may need replacing.                 |
| Does not boot from floppy drive                                  | Check boot order in BIOS Setup.<br>Make sure the OmniBook is docked properly.                                                                               |                                                                                                                                                                                                                              |
| Error message such as "Invalid system disk" or "Auto IDE error." | Run OmniBook hardware diagnostic program.                                                                                                                   | See "OmniBook Diagnostic Program" on page 3-16.                                                                                                                                                                              |
| Sluggish startup or shutdown.                                    | Run ScanDisk and Disk Defragmenter to check and optimize the hard drive.<br>Delete temporary and unneeded files.                                            |                                                                                                                                                                                                                              |
| Password has been forgotten                                      | Contact HP.                                                                                                                                                 |                                                                                                                                                                                                                              |

| Symptom                                          | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Comment                                                                                                                                                                                                                                                                                                             |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Battery</b>                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                     |
| The battery cannot be charged.                   | Recharge the battery properly according to "To recharge the internal battery" in the user's guide.<br>Check the power source.<br>Check ac adapter. If available, try another ac adapter.                                                                                                                                                                                                                                                                  | If battery will not recharge, battery may need replacing.                                                                                                                                                                                                                                                           |
| Short battery operating time.                    | Turn down display brightness.<br>Check power management settings in BIOS Setup.<br>Try the default settings.<br>Inform user that certain applications can cause excess power usage. (User can get power monitor from <a href="http://www.intel.com">www.intel.com</a> and monitor CPU load.)<br>Remove LAN and PC cards and modems when not in use.<br>Recharge the battery properly according to "To recharge the internal battery" in the user's guide. | LAN and PC cards and modems may have very high usage and idle power consumption.<br>Make sure the room temperature is within the operating temperature specification for the OmniBook and charge the battery for at least 10 hours.<br>If the battery has an extremely short operating time, it may need replacing. |
| Battery slice does not work, main battery works. | Check that battery slice is properly seated.                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                     |
| Battery slice cannot be charged.                 | Check whether the battery slice was recharged correctly.                                                                                                                                                                                                                                                                                                                                                                                                  | Recharge the battery slice properly according to "To charge a battery slice" in the user's guide.                                                                                                                                                                                                                   |
| The battery operating time is extremely short    | Replace the battery.                                                                                                                                                                                                                                                                                                                                                                                                                                      | If the recharged battery does not work or has short operating time, it may need to be replaced.                                                                                                                                                                                                                     |

| Symptom                                | Action                                                                                                                                                                                           | Comment                                                                                                        |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| <b>Display</b>                         |                                                                                                                                                                                                  |                                                                                                                |
| Nothing appears on the display screen. | Press the keys or power button to check whether the OmniBook has been switched to the Power Savings mode.<br>Press system-off switch.<br>Check whether the contrast control is in best position. | Restore the OmniBook from the Power Savings mode.<br><br>Adjust the contrast control the obtain best contrast. |
| Bright or missing pixels or lines      | See "Hewlett-Packard TFT Display Quality Statement" on page 4-2.                                                                                                                                 |                                                                                                                |

| Symptom                                         | Action                                                                                                                                                                                                                    | Comment                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hard Disk</b>                                |                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                           |
| The OmniBook does not start from the hard disk. | Check whether the setup utility has the proper configuration set for the hard disk.<br>Check whether the security is set using the Setup utility.<br>Check whether the operating system file is damaged or has a problem. | Set the hard disk on the Primary Master screen properly. See "BIOS Setup Utility" on page 3-26.<br>Set Fixed Disk Boot Sector. See "BIOS Setup Utility" on page 3-26.<br>Insert the floppy disk containing operating system in the floppy disk drive and try to start up the system from the floppy disk. |
| Hard disk never spins.                          | Check the power source.<br>Reset the OmniBook and restart.                                                                                                                                                                | If the power source is OK, the hard disk may be defective.                                                                                                                                                                                                                                                |
| Hard disk makes clunking or scratching noise.   | Back up the drive immediately.                                                                                                                                                                                            | Was the OmniBook or drive dropped?                                                                                                                                                                                                                                                                        |
| Hard disk makes buzzing or whining noise.       | Back up the drive immediately.<br>Check for alternate noise sources.                                                                                                                                                      | If a keystroke causes the sound to change, it may be power supply noise.                                                                                                                                                                                                                                  |
| Files are corrupted.                            | Run a virus scan program. Boot to DOS and run SCANDISK to look for problems, run SCANDISK /f to fix. Run Scandisk surface scan to check the platter. Use Recovery CD to recover the factory build.                        |                                                                                                                                                                                                                                                                                                           |

| Symptom                          | Action                                                                                                                                                                                    | Comment                                                                                                                                     |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Floppy Disk</b>               |                                                                                                                                                                                           |                                                                                                                                             |
| Floppy disk drive fails to work. | Check whether the OmniBook is connected properly to the multimedia slice.<br>Check whether the floppy disk is properly loaded in the floppy disk drive.<br>Try using another floppy disk. | See "To connect the expansion slice" in the user's guide.<br><br>Unload the Floppy Disk from the Floppy Disk Drive and reload it correctly. |

| Symptom                                             | Action                                                            | Comment                                           |
|-----------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------|
| <b>Keyboard</b>                                     |                                                                   |                                                   |
| The keyboard fails to respond.                      | Check whether the OmniBook has been switched to the suspend mode. | Restore the OmniBook from the suspend mode.       |
| Keys do not type the characters marked on the keys. | Make sure the correct keyboard layout is selected.                | See "To change the keyboard layout" on page 3-29. |

| Symptom                                                          | Action                                                                                                                                                          | Comment                                                                                      |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <b>External Keyboard, Numeric Keypad or Mouse</b>                |                                                                                                                                                                 |                                                                                              |
| The external keyboard, numeric keypad or mouse fails to respond. | Check whether the cable of the input device is connected securely to the OmniBook.<br><br>Make sure the OmniBook is docked correctly with the multimedia slice. | Connect the cable securely.<br><br>Shut down the OmniBook and reconnect the multimedia slice |



| Symptom                         | Action                                                                                                                                                                                                                                                                                                                                                                          | Comment                                                                                                                                                                                                                                                                                                                                                                      |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Printer</b>                  |                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                              |
| Parallel printer does not work. | <p>Check whether the OmniBook is connected properly to the multimedia slice.</p> <p>Check whether the printer's cable is connected securely to the OmniBook.</p> <p>Check whether Setup utility has enabled the parallel port.</p> <p>Check whether the printer driver used is correct.</p> <p>Check whether the printer has been turned on before turning on the OmniBook.</p> | <p>See "To connect the expansion slice" in the user's guide.</p> <p>Connect the printer correctly according to "To connect a parallel device" in the user's guide.</p> <p>.Set the correct value of parallel port. See "BIOS Setup Utility" on page 3-26.</p> <p>Use a printer driver that supports the printer connected. See "Installing Drivers" in the user's guide.</p> |

| Symptom                                                | Action                                                                                                               | Comment                                                                                                                                       |
|--------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Touch Pad</b>                                       |                                                                                                                      |                                                                                                                                               |
| The touch pad fails to work or does not work properly. | <p>Check whether the driver for the touch pad is used.</p> <p>Check the setting of the driver for the touch pad.</p> | <p>Use the driver for the touch pad. See "Installing Drivers" in the user's guide.</p> <p>Sets the driver for the touch pad for easy use.</p> |

| Symptom                               | Action                                                                                            | Comment                                                                                                                         |
|---------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Infrared Communication</b>         |                                                                                                   |                                                                                                                                 |
| Infrared communication is impossible. | Check whether the Setup utility has enabled the serial B port.                                    | Set the correct value for base I/O address of the Serial B port so that it is not fall on the address or IRQs of another items. |
|                                       | Check whether the surface of the infrared communication port is dirty.                            | Clean the surface of the port.                                                                                                  |
|                                       | Check whether a cable or any other obstacle is placed between the two infrared ports.             | Do not place anything between the two ports.                                                                                    |
|                                       | Disable and then re-enable IR using the Options tab of the IR monitor.                            | The OmniBook may have been suspended and resumed with IR enabled.                                                               |
|                                       | Uninstall the IR using the uninstall procedure and reinstall it carefully following the procedure | IR may not have been installed correctly                                                                                        |
|                                       | Run the 2-unit IR test in the OmniBook diagnostic program.                                        | See page 3-16.                                                                                                                  |

| Symptom                                                                                | Action                                                                                                                                                                                                                                                                                                                                                                                                                                           | Comment                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Infrared Communication (Continued)</b>                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                  |
| Data is transferred incorrectly, or something is received in a non-communication mode. | <p>Check whether there is any bright light source, such as sunshine or incandescent light, near the system.</p> <p>Check whether there is any device using infrared, such as a remote control or wireless headphones, near the OmniBook system.</p> <p>Check whether the distance between the ports is correct and the angle between the ports is OK.</p> <p>Check whether the communication protocol matches the one for the remote system.</p> | <p>Use your system at locations away from sunshine or any other bright light source.</p> <p>During infrared communication, avoid using any other infrared devices near the system.</p> <p>Use the correct distance and angle of range according to "To make an infrared connection in the user's guide.</p> <p>Match the communication protocol according to the help screen of the utility.</p> |

| Symptom               | Action                                                                                                                                                                                        | Comment                                                                                                                                                                      |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CD-ROM</b>         |                                                                                                                                                                                               |                                                                                                                                                                              |
| CD-ROM fails to work. | <p>Check whether the OmniBook is connected properly to the multimedia slice.</p> <p>Check whether the CD-ROM is properly loaded in the CD-ROM drive.</p> <p>Try using a different CD-ROM.</p> | <p>See "To connect the expansion slice" in the user's guide.</p> <p>Unload the CD-ROM from the CD-ROM drive and reload it correctly.</p> <p>The CD-ROM may be defective.</p> |

| Symptom                                              | Action                                                                                                                                                                                                                                                                                         | Comment                                                                                                                                                                                                                                   |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Microphone, Headphones, Other audio equipment</b> |                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                           |
| Audio function does not work.                        | Check whether the OmniBook is connected properly to the multimedia slice.                                                                                                                                                                                                                      | See "To connect the expansion slice" in the user's guide.                                                                                                                                                                                 |
| Recording cannot be done.                            | <p>Check whether the microphone plug is correctly connected to the line/microphone input jack on the OmniBook.</p> <p>Check whether the microphone's power is on.</p> <p>Check whether the audio equipment plug is correctly connected to the line/microphone input jack on the OmniBook.</p>  | <p>Connect the plug correctly. See "To connect audio devices" in the user's guide.</p> <p>Turn on the microphone's power.</p> <p>Connect the plug correctly. See "To connect audio devices" in the user's guide.</p>                      |
| No sound output                                      | <p>Check whether the headphone is correctly plugged into the audio output jack.</p> <p>Check whether the speaker with a built-in amplifier is correctly plugged into the audio output jack on the OmniBook.</p> <p>Check whether the power of the speaker with a built-in amplifier is on.</p> | <p>Connect the plug correctly. See "To connect audio devices" in the user's guide.</p> <p>Connect the plug correctly. See "To connect audio devices" in the user's guide.</p> <p>Turn on the power of the amplified built-in speaker.</p> |

| Symptom                        | Action                                                                                                                                                                                                                                                                                                       | Comment                                                                                                                                                                                                                                                                                                                          |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Serial Port</b>             |                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                  |
| The Serial port fails to work. | <p>Check whether the cable of Serial port is connected securely to the OmniBook.</p> <p>Check whether OmniBook is docked correctly with multimedia slice.</p> <p>Check whether Setup utility has enabled the serial port.</p> <p>Check whether the software used is set correctly for using Serial port.</p> | <p>Connect the cable securely. See "To connect a serial device" in the user's guide.</p> <p>See "To connect the expansion slice" in the user's guide.</p> <p>Set the correct value of the Serial port. See "BIOS Setup Utility" on page 3-26.</p> <p>Use the correct software. See "Installing drivers" in the user's guide.</p> |

| Symptom                             | Action                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Comment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>PC Card</b>                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| The PC Card fails to work properly. | <p>Check whether the PC Card is installed correctly in the OmniBook.</p> <p>Check whether the cable is connected correctly to the PC Card.<br/>(Only for the communication PC card)</p> <p>Check whether the software used is correct for using the PC card</p> <p>Check whether the OmniBook switches to the suspend mode before a PC card failure occurs (When using a communication PC card).</p> <p>Check whether the PC card has been installed or removed during OmniBook operation.</p> | <p>Install the PC Card properly. See "To insert a PC Card" in the user's guide and the documentation included with the PC card.</p> <p>Connect the cable correctly. See the documentation included with the PC card.</p> <p>Install the software correctly according to the "Installing Software" chapter in the user's guide and the documentation included with the PC card.</p> <p>Restart the OmniBook. (Set the OmniBook so that it does not switch to the Suspend mode while using the communication PC card.)</p> <p>Install or remove the PC card correctly according to "To remove a PC Card" in the user's guide.</p> |
| PC card is hot                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | This is normal for many cards.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

| Symptom                                                                         | Action                                                                                                                                                                                                                                                                                                                                                                                                                        | Comment                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>External Monitor</b>                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                 |
| The external monitor does not display anything.                                 | <p>Check whether the external monitor is turned on.</p> <p>Check whether the brightness and contrast of the external monitor are adjusted correctly.</p> <p>Check whether the cable of the external monitor is connected securely to the connector on the multimedia slice.</p> <p>Check whether the OmniBook is in Suspend to RAM mode.</p> <p>Check whether the OmniBook is connected properly to the multimedia slice.</p> | <p>Turn on the external monitor.</p> <p>Adjust the brightness and contrast of the external monitor according to the manual supplied with external monitor.</p> <p>Connect the cable securely. See "To connect an external monitor" in the user's guide.</p> <p>Press any key or power switch to restore the OmniBook from Suspend mode.</p> <p>See "To connecting the expansion slice" in the user's guide.</p> |
| Simultaneous display of the external monitor and the LCD display is impossible. | Check whether the external monitor supports the resolution used for the LCD display.                                                                                                                                                                                                                                                                                                                                          | Use an external monitor that supports the resolution used for the LCD.                                                                                                                                                                                                                                                                                                                                          |
| High resolution display is impossible.                                          | <p>High resolution display is possible only under the Windows 95 environment.</p> <p>Check whether the driver for high resolution display is installed correctly.</p>                                                                                                                                                                                                                                                         | Install the driver correctly. . See "installing Drivers" in the user's guide.                                                                                                                                                                                                                                                                                                                                   |
| The display position is skewed or the screen is distorted.                      | Adjust the display dimensions, position, or pincushion distortion according to the manual supplied with the external monitor.                                                                                                                                                                                                                                                                                                 | This is not a failure.                                                                                                                                                                                                                                                                                                                                                                                          |

# Using Diagnostic Tools

This section describes the following diagnostic tools you can use for troubleshooting and repairing the OmniBook:

- Power-on self-test (POST).
- OmniBook hardware diagnostic program.
- BIOS Setup utility.

The following table shows how you can use the different diagnostic tools to isolate the cause.

**Table 3-2. Scope of Diagnostic Tools**

| Function                                                                                                                                                                                             | OmniBook Diagnostics           | Power-On Self-Test      | BIOS Setup |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------|------------|
| <b>Bootup</b>                                                                                                                                                                                        |                                | Tests                   | Configures |
| <b>Processor</b>                                                                                                                                                                                     | Tests<br>(System menu)         | Tests                   |            |
| <b>Memory</b>                                                                                                                                                                                        | Tests<br>(Memory menu)         | Tests                   | Describes  |
| <b>Display</b>                                                                                                                                                                                       | Tests<br>(Memory, Video menus) |                         |            |
| <b>Hard disk</b>                                                                                                                                                                                     | Tests<br>(IDE menu)            | Tests                   | Configures |
| <b>Floppy drive</b>                                                                                                                                                                                  | Tests<br>(FDD menu)            | Tests                   | Describes  |
| <b>Keyboard</b>                                                                                                                                                                                      | Tests<br>(KBD menu)            | Tests                   |            |
| <b>Touch pad</b>                                                                                                                                                                                     | Tests<br>(Misc menu)           |                         | Configures |
| <b>Audio and Speakers</b>                                                                                                                                                                            | Tests<br>(System, Misc menu)   |                         | Configures |
| <b>Serial</b>                                                                                                                                                                                        | Tests*<br>(Misc menu)          |                         | Configures |
| <b>Parallel</b>                                                                                                                                                                                      | Tests*<br>(Misc menu)          |                         | Configures |
| <b>Infrared</b>                                                                                                                                                                                      | Tests†<br>(Misc Menu)          |                         | Configures |
| <b>PS/2 port</b>                                                                                                                                                                                     | Tests†<br>(KBD, Misc menus)    |                         |            |
| <b>USB</b>                                                                                                                                                                                           | Tests†<br>(System menus)       |                         |            |
| <b>PCMCIA</b>                                                                                                                                                                                        |                                |                         |            |
| <b>CD-ROM drive</b>                                                                                                                                                                                  | Tests<br>(IDE menu)            | Tests<br>(with boot CD) | Configures |
| * The diagnostic test is more thorough if you use a loopback connector. See page 3-18.<br>† Connect an appropriate external device to exercise the port. See the help text for the tests in the menu |                                |                         |            |

## Power-On Self-Test

The POST (Power-On Self-Test) is a series of initialization routines and diagnostic tests that the system BIOS runs when the OmniBook boots. The system BIOS will not boot the operating system if system memory, the CPU, DMA, or the interrupt controller fails the POST diagnostic tests. POST progress is indicated by a sequence of codes. If possible, error messages are displayed.

You should not interpret the failure of one or more POST tests as a hardware, software, or firmware failure. First, confirm the failure with a “clean” boot:

- Remove all accessories, including RAM boards, floppy drive, port replicator, PC Cards, printer, external monitor, pointing device, and keyboard.
- Provide “clean” ac power—no auto adapter or unusual ac adapter configuration.
- Press the system-off button to start from a known state.

If the OmniBook fails to boot with a clean boot, it requires repair. If an error message is displayed, *confirm the problem using other diagnostic tools*. Not all POST messages indicate a hardware, software, or firmware failure—some messages are informational messages.

If the BIOS detects a terminal error condition, it halts POST after issuing a terminal error beep code—up to four groups of 1 to 4 short beeps. The beep code indicates the POST routine in which the terminal error occurred. The BIOS also issues a beep code (one long tone followed by two short tones) during POST if the video configuration fails (no card installed or faulty) or if an external ROM module does not properly checksum to zero.

**Table 3-1. POST Terminal-Error Beep Codes**

| Beep Codes | POST Description                                                      |
|------------|-----------------------------------------------------------------------|
| 1          | One short beep before boot                                            |
| 1-2        | Search for option ROMs. One long, two short beeps on checksum failure |
| 1-2-2-3    | BIOS ROM checksum                                                     |
| 1-3-1-1    | Test DRAM refresh                                                     |
| 1-3-1-3    | Test 8742 Keyboard Controller                                         |
| 1-3-4-1    | RAM failure on address line xxxx                                      |
| 1-3-4-3    | RAM failure on data bits xxxx of low byte of memory bus               |
| 1-4-1-1    | RAM failure on data bits xxxx of high byte of memory bus              |
| 2-1-2-3    | Check ROM copyright notice                                            |
| 2-2-3-1    | Test for unexpected interrupts                                        |

The following table lists POST messages and explanations for reported problems. If the system fails after you make changes in BIOS Setup, reset the OmniBook, enter BIOS Setup, and install the defaults or correct the error.

**Table 3-2. POST Messages**

| Message                 | Description                                                                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0200 Failure Fixed Disk | Fixed disk is not working or not configured properly. Check to see if fixed disk is attached properly. Run Setup. Find out if the fixed-disk type is correctly identified. |
| 0210 Stuck key          | Stuck key on keyboard.                                                                                                                                                     |
| 0211 Keyboard error     | Keyboard not working.                                                                                                                                                      |

| Message                                                                  | Description                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>0212 Keyboard Controller Failed</b>                                   | Keyboard controller failed test. May require replacing keyboard controller.                                                                                                                                                                                                                                                                                          |
| <b>0213 Keyboard locked - Unlock key switch</b>                          | Unlock the system to proceed.                                                                                                                                                                                                                                                                                                                                        |
| <b>0220 Monitor type does not match CMOS - Run SETUP</b>                 | Monitor type not correctly identified in Setup                                                                                                                                                                                                                                                                                                                       |
| <b>0230 Shadow Ram Failed at offset: <i>nnnn</i></b>                     | Shadow RAM failed at offset <i>nnnn</i> of the 64k block at which the error was detected.                                                                                                                                                                                                                                                                            |
| <b>0231 System RAM Failed at offset: <i>nnnn</i></b>                     | System RAM failed at offset <i>nnnn</i> of the 64k block at which the error was detected.                                                                                                                                                                                                                                                                            |
| <b>0232 Extended RAM Failed at offset: <i>nnnn</i></b>                   | Extended memory not working or not configured properly at offset <i>nnnn</i> .                                                                                                                                                                                                                                                                                       |
| <b>0250 System battery is dead - Replace and run SETUP</b>               | The CMOS clock battery indicator shows the battery is dead. Connect the ac adapter for at least 24 hours, replace the motherboard.                                                                                                                                                                                                                                   |
| <b>0251 System CMOS checksum bad - Default configuration used</b>        | System CMOS has been corrupted or modified incorrectly, perhaps by an application program that changes data stored in CMOS. The BIOS installed Default Setup Values. If you do not want these values, enter Setup and enter your own values. If the error persists, check the system battery. Connect the ac adapter for at least 24 hours, replace the motherboard. |
| <b>0260 System timer error</b>                                           | The timer test failed. Requires repair of system board.                                                                                                                                                                                                                                                                                                              |
| <b>0270 Real time clock error</b>                                        | Real-time clock fails BIOS test. May require board repair.                                                                                                                                                                                                                                                                                                           |
| <b>0280 Previous boot incomplete - Default configuration used</b>        | Previous POST did not complete successfully. POST loads default values and offers to run Setup. If the failure was caused by incorrect values and they are not corrected, the next boot will likely fail. This error is cleared the next time the system is booted.                                                                                                  |
| <b>0281 Memory Size found by POST differed from CMOS</b>                 | Memory size found by POST differed from CMOS.                                                                                                                                                                                                                                                                                                                        |
| <b>02B0 Diskette drive A error</b><br><b>02B1 Diskette drive B error</b> | Drive A: or B: is present but fails the BIOS POST diskette tests. Check to see that the drive is defined with the proper diskette type in Setup and that the diskette drive is attached correctly.                                                                                                                                                                   |
| <b>02B2 Incorrect Drive A type - run SETUP</b>                           | Type of floppy drive A: not correctly identified in Setup.                                                                                                                                                                                                                                                                                                           |
| <b>02B3 Incorrect Drive B type - run SETUP</b>                           | Type of floppy drive B: not correctly identified in Setup.                                                                                                                                                                                                                                                                                                           |
| <b>02D0 System cache error - Cache disabled</b>                          | RAM cache failed and BIOS disabled the cache. On older boards, check the cache jumpers. You may have to replace the cache. See your dealer. A disabled cache slows system performance considerably.                                                                                                                                                                  |
| <b>02F0: CPU ID:</b>                                                     | CPU socket number for Multi-Processor error.                                                                                                                                                                                                                                                                                                                         |
| <b>02F4: EISA CMOS not writeable</b>                                     | ServerBIOS2 test error: Cannot write to EISA CMOS.                                                                                                                                                                                                                                                                                                                   |
| <b>02F5: DMA Test Failed</b>                                             | ServerBIOS2 test error: Cannot write to extended DMA (Direct Memory Access) registers.                                                                                                                                                                                                                                                                               |
| <b>02F6: Software NMI Failed</b>                                         | ServerBIOS2 test error: Cannot generate software NMI (Non-Maskable Interrupt).                                                                                                                                                                                                                                                                                       |
| <b>02F7: Fail-Safe Timer NMI Failed</b>                                  | ServerBIOS2 test error: Fail-Safe Timer takes too long.                                                                                                                                                                                                                                                                                                              |
| <b><i>device</i> Address Conflict</b>                                    | Address conflict for specified device.                                                                                                                                                                                                                                                                                                                               |
| <b>Allocation Error for: <i>device</i></b>                               | Run ISA or EISA Configuration Utility to resolve resource conflict for the specified device.                                                                                                                                                                                                                                                                         |
| <b>CD ROM Drive</b>                                                      | CD ROM Drive identified.                                                                                                                                                                                                                                                                                                                                             |
| <b>Entering SETUP ...</b>                                                | Starting Setup program                                                                                                                                                                                                                                                                                                                                               |

| Message                                                                         | Description                                                                                                                                                                                                                                                                                                          |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Failing Bits: <i>nnnn</i></b>                                                | The hex number <i>nnnn</i> is a map of the bits at the RAM address which failed the memory test. Each 1 (one) in the map indicates a failed bit. See errors 230, 231, or 232 above for offset address of the failure in System, Extended, or Shadow memory.                                                          |
| <b>Fixed Disk <i>n</i></b>                                                      | Fixed disk <i>n</i> (0-3) identified.                                                                                                                                                                                                                                                                                |
| <b>Invalid System Configuration Data</b>                                        | Problem with NVRAM (CMOS) data.                                                                                                                                                                                                                                                                                      |
| <b>I/O device IRQ conflict</b>                                                  | I/O device IRQ conflict error.                                                                                                                                                                                                                                                                                       |
| <b>PS/2 Mouse Boot Summary Screen:</b>                                          | PS/2 Mouse installed.                                                                                                                                                                                                                                                                                                |
| <b><i>nnnn</i> kB Extended RAM Passed</b>                                       | Where <i>nnnn</i> is the amount of RAM in kilobytes successfully tested.                                                                                                                                                                                                                                             |
| <b><i>nnnn</i> Cache SRAM Passed</b>                                            | Where <i>nnnn</i> is the amount of system cache in kilobytes successfully tested.                                                                                                                                                                                                                                    |
| <b><i>nnnn</i> kB Shadow RAM Passed</b>                                         | Where <i>nnnn</i> is the amount of shadow RAM in kilobytes successfully tested.                                                                                                                                                                                                                                      |
| <b><i>nnnn</i> kB System RAM Passed</b>                                         | Where <i>nnnn</i> is the amount of system RAM in kilobytes successfully tested.                                                                                                                                                                                                                                      |
| <b>Operating system not found</b>                                               | Operating system cannot be located on either drive A: or drive C:. Enter Setup and see if fixed disk and drive A: are properly identified.                                                                                                                                                                           |
| <b>Parity Check 1 <i>nnnn</i></b>                                               | Parity error found in the system bus. BIOS attempts to locate the address and display it on the screen. If it cannot locate the address, it displays ?????. Parity is a method for checking errors in binary data. A parity error indicates that some data has been corrupted.                                       |
| <b>Parity Check 2 <i>nnnn</i></b>                                               | Parity error found in the I/O bus. BIOS attempts to locate the address and display it on the screen. If it cannot locate the address, it displays ????.                                                                                                                                                              |
| <b>Press &lt;F1&gt; to resume, &lt;F2&gt; to Setup, &lt;F3&gt; for previous</b> | Displayed after any recoverable error message. Press <F1> to start the boot process or <F2> to enter Setup and change the settings. Press <F3> to display the previous screen (usually an initialization error of an Option ROM, such as an add-on card). Write down and follow the information shown on the screen. |
| <b>Press &lt;F2&gt; to enter Setup</b>                                          | Optional message displayed during POST.                                                                                                                                                                                                                                                                              |
| <b>PS/2 Mouse:</b>                                                              | PS/2 mouse identified.                                                                                                                                                                                                                                                                                               |
| <b>System BIOS shadowed</b>                                                     | System BIOS copied to shadow RAM.                                                                                                                                                                                                                                                                                    |
| <b>UMB upper limit segment address: <i>nnnn</i></b>                             | Displays the address <i>nnnn</i> of the upper limit of Upper Memory Blocks, indicating released segments of the BIOS which can be reclaimed by a virtual memory manager.                                                                                                                                             |
| <b>Video BIOS shadowed</b>                                                      | Video BIOS copied to shadow RAM.                                                                                                                                                                                                                                                                                     |



## OmniBook Diagnostic Program

The OmniBook hardware diagnostic program provides two levels of testing:

- User-level testing using the basic hardware test.
- Advanced testing using the individual hardware tests.

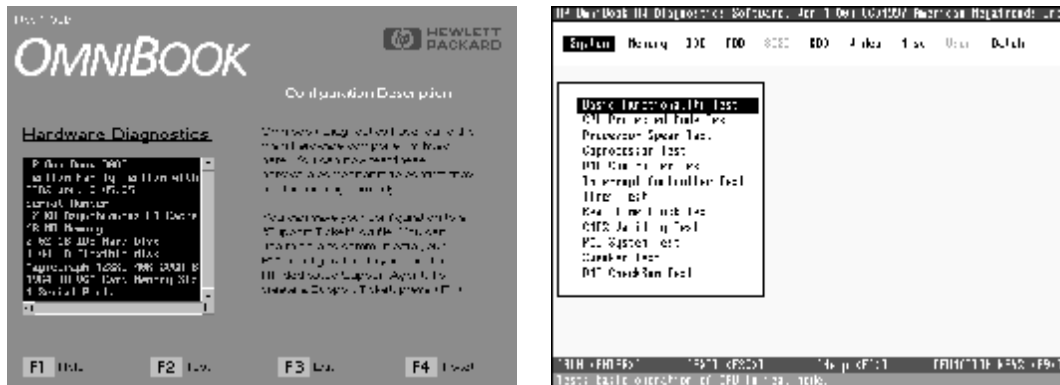


Figure 3-2. OmniBook Diagnostic Screens — Basic and Advanced

The tests are designed to run after the system reboots. This ensures that the OmniBook will be in a predictable state, so the diagnostic program can properly test the hardware components. The tests are non-destructive and are intended to preserve the state of the OmniBook. The OmniBook reboots when you exit the program so drivers can be loaded.

### Creating a Diagnostic Floppy Disk

#### Note

You must create the diagnostic disk on an OmniBook Sojourn. It does not need to be created on the OmniBook Sojourn on which you will run the diagnostics.

After inserting a formatted floppy disk in the floppy drive, do one of the following to create a diagnostic floppy disk:

- On an OmniBook Sojourn with a factory software installation, run **diaginst** from the \Dmi\Hpdiags directory on the hard disk.
- On any OmniBook Sojourn, run **diaginst** from the \OmniBook\Dmi\Hpdiags directory on the OmniBook Sojourn Recovery CD.
- On any OmniBook Sojourn with World Wide Web access, download the diagnostic software package from the OmniBook website (see page v), run this file to unpack the files, then run **diaginst** to create the diagnostic disk.

## Running the Diagnostic Test

### CAUTION

Disconnect any external monitor before running the diagnostic tests. The LCD test is designed to work only with the LCD and could damage your external monitor.

1. Insert the diagnostic disk in the floppy drive.
2. Reboot the OmniBook.
3. Go through the first several screens.
4. When the hardware detection finishes, check the list of detected hardware. The following information and devices should be listed if applicable:

|                |                  |                           |
|----------------|------------------|---------------------------|
| Product name   | Main memory      | Floppy drives             |
| BIOS version   | Graphics adapter | IDE drives                |
| Processor type | Display name     | SoundBlaster audio device |
| Cache memory   |                  |                           |

### Note

If a device is not detected or fails its test below, it may be configured incorrectly in the BIOS Setup utility (page 3-26). You can confirm the problem by running BIOS Setup and checking the settings.

To run the serial and parallel (COMM and LPT1) port tests, you must set the OS Legacy Mode Support setting to No in the BIOS Setup utility. Otherwise the diagnostic program will not see these ports.

1. **Run the basic test.** Press F2 to start the basic hardware test.
2. If you intend to exit without running advanced tests, press F4 to save system and test information in the Support Ticket log file, HPSUPPT.TXT. Then remove the diagnostic disk and press F3 to exit.
3. **Run the advanced tests.** Press F2 to open the advanced test screen.
4. Select and run the appropriate tests. Tests are not listed if no such hardware is detected. Press the following keys to run tests:

|             |                                                 |
|-------------|-------------------------------------------------|
| ENTER       | Runs the highlighted test.                      |
| F5 or SPACE | Marks or unmarks the highlighted test.          |
| F6          | Marks or unmarks all tests in the current menu. |
| F7          | Marks or unmarks all tests in all menus.        |
| F10         | Runs all marked tests.                          |


If any test fails, the error is logged (error code and description) and displayed temporarily (error code). If several errors occur, look for patterns that might indicate a common cause. See the table on 3-21 for repair suggestions. Consider these suggestions in combination with other troubleshooting information.

5. When you are finished running tests, press ESC to exit the advanced tests.
6. Press F4 to save system and test information in the Support Ticket log file, HPSUPPT.TXT.
7. **Exit.** Press F3 to exit and reboot.
8. **Optional: Check the log.** On any OmniBook, open the HPSUPPT.TXT log file on the diagnostic disk using Notepad or other text editor. It contains a hardware summary and a list of all test results and errors.

**Note**

- To test the serial and parallel ports, go into BIOS setup (see page 3-27) and make sure both are set to "Enabled" in the Advanced menu.
- To enable the suspend/resume test to work, go into the Power Savings menu in BIOS setup and set Switch Button to "Sus/Res" and set Resume On Time to "On".
- If you want to test IR, enable "serial B port" in the Advanced menu in BIOS setup and set the mode to "FIR". Also make sure that the parallel port mode is not "ECP" (there would be a DMA conflict).

Note that the serial and parallel port tests are more thorough if you connect a loopback connector to the port before running the test for that port. See the wiring diagrams below.

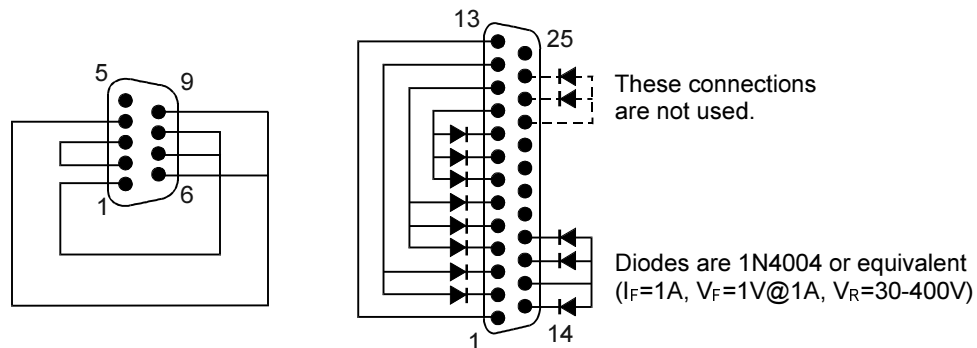

**Figure 3-3. Serial and Parallel Loopback Connectors**

## Interpreting the Results

- The following table lists test groups, error codes, and suggestions for follow-up actions. Consider these suggestions in combination with other troubleshooting information.

**Table 3-5. OmniBook Diagnostic Error Codes**

| Code                | Explanation                                                      | Recommended Action         |
|---------------------|------------------------------------------------------------------|----------------------------|
| <b>System Tests</b> |                                                                  |                            |
| 0001h               | Cannot load the MSW (Machine Status Word).                       | Exchange OmniBook Sojourn. |
| 0002h               | Cannot load the GDT (Global Descriptor Table) Register.          | Exchange OmniBook Sojourn. |
| 0003h               | Cannot load the IDT (Interrupt Descriptor Table) Register.       | Exchange OmniBook Sojourn. |
| 0004h               | ARPL instruction execution error.                                | Exchange OmniBook Sojourn. |
| 0005h               | LAR (Load Access Rights Byte) instruction execution error.       | Exchange OmniBook Sojourn. |
| 0006h               | LSL (Load Segment Limit) instruction execution error.            | Exchange OmniBook Sojourn. |
| 0007h               | VERR (Verify a Segment for Reading) instruction execution error. | Exchange OmniBook Sojourn. |
| 0008h               | VERW (Verify a Segment for Writing) instruction execution error. | Exchange OmniBook Sojourn. |
| 0009h               | Cannot enable the A20 line.                                      | Exchange OmniBook Sojourn. |
| 0010h               | 32-bit register read or write error.                             | Exchange OmniBook Sojourn. |
| 0011h               | PUSHA(D) or POPA(D) execution error.                             | Exchange OmniBook Sojourn. |
| 0012h               | Cannot access data through the FS or GS registers.               | Exchange OmniBook Sojourn. |
| 0013h               | BSF or BSR execution error.                                      | Exchange OmniBook Sojourn. |
| 0014h               | FLAG Register Set or Reset error.                                | Exchange OmniBook Sojourn. |
| 0015h               | Protected mode instruction execution error.                      | Exchange OmniBook Sojourn. |
| 0016h               | 32-bit multiplication error.                                     | Exchange OmniBook Sojourn. |
| 001Eh               | The detected CPU speed is not the same as specified.             | Exchange OmniBook Sojourn. |
| 0020h               | NDP not ready.                                                   | Exchange OmniBook Sojourn. |
| 0021h               | Cannot reset the NDP.                                            | Exchange OmniBook Sojourn. |
| 0022h - 0025h       | NDP control word read or write error.                            | Exchange OmniBook Sojourn. |
| 0026h               | Cannot reset the NDP control word.                               | Exchange OmniBook Sojourn. |
| 0027h               | NDP Tag word read or write error.                                | Exchange OmniBook Sojourn. |
| 0028h               | NDP stack read or write error.                                   | Exchange OmniBook Sojourn. |
| 0029h - 002Ah       | NDP operation status handling error.                             | Exchange OmniBook Sojourn. |
| 002B                | Integer load or store error.                                     | Exchange OmniBook Sojourn. |
| 002Ch               | NDP Tag word read or write error.                                | Exchange OmniBook Sojourn. |
| 002Dh               | NDP stack pop error.                                             | Exchange OmniBook Sojourn. |
| 002Eh - 002Fh       | NDP Tag word read or write error.                                | Exchange OmniBook Sojourn. |
| 0030h               | Read/Write test on DMA controller 1 failed.                      | Exchange OmniBook Sojourn. |
| 0031h               | Read/Write test on DMA controller 2 failed.                      | Exchange OmniBook Sojourn. |
| 0032h               | Read/Write test on page registers failed.                        | Exchange OmniBook Sojourn. |

| Code                            | Explanation                                                                                                                     | Recommended Action                                                                      |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>System Tests (Continued)</b> |                                                                                                                                 |                                                                                         |
| 0040h                           | Read/Write test on PIC ports failed.                                                                                            | Exchange OmniBook Sojourn.                                                              |
| 0041h                           | Stray or unrecognized interrupts detected.                                                                                      | Run BIOS Setup and check IRQ assignments for all devices.<br>Exchange OmniBook Sojourn. |
| 0050h                           | The Timer Periodic Interrupt is not being generated.                                                                            | Exchange OmniBook Sojourn.                                                              |
| 0051h                           | The Timer is counting at a slower rate. Compared against the Real Time Clock, the timer counter rate is slower.                 | Exchange OmniBook Sojourn.                                                              |
| 0052h                           | The Timer is counting at a faster rate. Compared to the Real Time Clock, the timer counter rate is faster.                      | Exchange OmniBook Sojourn.                                                              |
| 0060h                           | The Real Time Clock Periodic Interrupt is not being generated.                                                                  | Exchange OmniBook Sojourn.                                                              |
| 0061h                           | The Real Time Clock is running at a slower rate. Compared to the system timer, the Real Time Clock is running at a slower rate. | Exchange OmniBook Sojourn.                                                              |
| 0062h                           | The Real Time Clock is running at a faster rate. Compared to the system timer, the Real Time Clock is running at a faster rate. | Exchange OmniBook Sojourn.                                                              |
| 0063h                           | The date and time read from Real Time Clock CMOS RAM are different from that written.                                           | Exchange OmniBook Sojourn.                                                              |
| 0071h                           | Bad CMOS RAM checksum detected.                                                                                                 | Reset the system, then run BIOS Setup and check settings.<br>Exchange OmniBook Sojourn. |
| 0072h                           | Configuration mismatch in CMOS RAM.                                                                                             | Reset the system, then run BIOS Setup and check settings.<br>Exchange OmniBook Sojourn. |
| 0073h                           | CMOS RAM memory size information is invalid.                                                                                    | Reset the system, then run BIOS Setup and check settings.<br>Exchange OmniBook Sojourn. |
| 0074h                           | CMOS RAM time is invalid.                                                                                                       | Reset the system, then run BIOS Setup and check settings.<br>Exchange OmniBook Sojourn. |
| 0075h                           | Time-base frequency divider set at incorrect value.                                                                             | Reset the system.<br>Exchange OmniBook Sojourn.                                         |
| 0076h                           | Divider output frequency set to an incorrect value.                                                                             | Reset the system.<br>Exchange OmniBook Sojourn.                                         |
| 0077h                           | Periodic time update cycle not occurring.                                                                                       | Exchange OmniBook Sojourn.                                                              |
| 0078h                           | CMOS RAM checksum error detected.                                                                                               | Reset the system, then run BIOS Setup and check settings.<br>Exchange OmniBook Sojourn. |
| 0079h                           | CMOS RAM fails to hold data.                                                                                                    | Exchange OmniBook Sojourn.                                                              |
| 0083h                           | PCI System Bus scan test failed.                                                                                                | Exchange OmniBook Sojourn.                                                              |
| 0084h                           | Cannot access PCI devices through the FIND_PCI_DEVICE call.                                                                     | Exchange OmniBook Sojourn.                                                              |
| 0085h                           | Reading configuration space registers on boundary conditions failed.                                                            | Exchange OmniBook Sojourn.                                                              |
| 0086h                           | Consistency checking of PCI configuration space failed.                                                                         | Exchange OmniBook Sojourn.                                                              |

| Code                            | Explanation                                                               | Recommended Action                                                                          |
|---------------------------------|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| <b>System Tests (Continued)</b> |                                                                           |                                                                                             |
| 0087h                           | GENERATE_SPECIAL_CYCLE check failed.                                      | Exchange OmniBook Sojourn.                                                                  |
| 0088h                           | BIOS32 service directory integrity check failed.                          | Exchange OmniBook Sojourn.                                                                  |
| 0090h                           | PnP Function 00 failed.                                                   | Exchange OmniBook Sojourn.                                                                  |
| 0091h                           | PnP Function 01 failed.                                                   | Exchange OmniBook Sojourn.                                                                  |
| 0094h                           | The system device node number is not the same as reported.                | Exchange OmniBook Sojourn.                                                                  |
| 0095h                           | The size of one or more nodes is larger than reported.                    | Exchange OmniBook Sojourn.                                                                  |
| 0096h                           | The ISA bus was detected twice.                                           | Exchange OmniBook Sojourn.                                                                  |
| 009Ah                           | PnP Function 40 failed.                                                   | Exchange OmniBook Sojourn.                                                                  |
| 009Bh                           | Invalid number of PnP adapter cards.                                      | Exchange OmniBook Sojourn.                                                                  |
| 009Ch                           | One or more unknown PnP adapter cards.                                    | Exchange OmniBook Sojourn.                                                                  |
| 009Dh                           | No PCI system device node found.                                          | Exchange OmniBook Sojourn.                                                                  |
| 009Eh                           | Too many PCI buses.                                                       | Exchange OmniBook Sojourn.                                                                  |
| 009Fh                           | Not enough DOS Applications memory available.                             | Load fewer device drivers.                                                                  |
| 00A0h                           | PnP Function 41 failed.                                                   | No Action needed. (ESCD not supported).                                                     |
| 00A1h                           | The NVRAM buffer size is too large.                                       | Exchange OmniBook Sojourn.                                                                  |
| 00A2h                           | ESCD size too small.                                                      | No Action needed. (ESCD not supported).                                                     |
| 00A3h                           | ESCD size too large.                                                      | No Action needed. (ESCD not supported).                                                     |
| 00A4h                           | NVRAM base address invalid.                                               | Exchange OmniBook Sojourn.                                                                  |
| 00A5h                           | PnP Function 42 failed.                                                   | No Action needed. (ESCD not supported).                                                     |
| 00A6h                           | PnP Function 43 failed.                                                   | No Action needed. (ESCD not supported).                                                     |
| 00A7h                           | NVRAM test failed.                                                        | Exchange OmniBook Sojourn.                                                                  |
| 00FFh                           | Out of memory.                                                            | Rerun the test. Possible diagnostic programming error.                                      |
| <b>Memory Tests</b>             |                                                                           |                                                                                             |
| 0100h                           | ROM read error.                                                           | Exchange OmniBook Sojourn.                                                                  |
| 0101h                           | ROM not write protected.                                                  | Exchange OmniBook Sojourn.                                                                  |
| 0102h                           | BIOS cannot set year to 2000 after 1999.                                  | Exchange OmniBook Sojourn.                                                                  |
| 0120h                           | Parity error.                                                             | Exchange OmniBook Sojourn.                                                                  |
| 0130h                           | Different pattern read back from address then was written to the address. | Test without Cache ON.<br>Exchange OmniBook Sojourn.                                        |
| 0131h                           | Parity error during pattern test.                                         | Exchange OmniBook Sojourn.                                                                  |
| 0135h                           | ECC error detected.                                                       | Exchange OmniBook Sojourn.                                                                  |
| 0140h                           | Address failure.                                                          | Exchange OmniBook Sojourn.                                                                  |
| 0150h                           | Address failure                                                           | Exchange OmniBook Sojourn.                                                                  |
| 0160h                           | Address bus short.                                                        | Exchange OmniBook Sojourn.                                                                  |
| 0170h - 0172h                   | RAM refresh circuitry not working properly.                               | Exchange OmniBook Sojourn.                                                                  |
| 0180h                           | Different pattern read back from address then was written to the address. | Exchange OmniBook Sojourn.                                                                  |
| 0181h                           | No active external cache memory.                                          | Enable external cache memory through the BIOS Setup utility and retest.                     |
| 0182h                           | No extended memory available from HIMEN.SYS                               | Make sure that another application is not using all extended memory allocated by HIMEM.SYS. |
| 0183h                           | No detected extended memory.                                              | Exchange OmniBook Sojourn.                                                                  |
| 0190h                           | Test failed at address xxxxxxxh.                                          | Exchange OmniBook Sojourn.                                                                  |

|                          |                                                                                                                     |                                                                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| 01A0h                    | Different pattern read back from address then was written to the address.                                           | Exchange OmniBook Sojourn.                                                                                                                  |
| <b>Hard Disk Tests</b>   |                                                                                                                     |                                                                                                                                             |
| 0201h                    | Undefined or invalid command.                                                                                       | Exchange OmniBook Sojourn.                                                                                                                  |
| 0202h                    | Address mark not found.                                                                                             | Rerun the test. If the error persists, exchange the OmniBook Sojourn.                                                                       |
| 0204h                    | Requested sector not found.                                                                                         | Rerun the test. If the error persists, exchange the OmniBook Sojourn.                                                                       |
| 0205h                    | Reset failed.                                                                                                       | Exchange OmniBook Sojourn.                                                                                                                  |
| 0207h                    | Drive parameter activity failed.                                                                                    | Run BIOS Setup and check the hard disk type.<br>Exchange OmniBook Sojourn.                                                                  |
| 0208h                    | DMA Overrun error.                                                                                                  | Rerun the test.                                                                                                                             |
| 0209h                    | A DMA transfer at a 64 KB segment boundary was rejected by the drive controller BIOS.                               | Rerun the test.                                                                                                                             |
| 020Ah                    | Bad sector flag detected. A sector previously marked bad was tested.                                                | Rerun the test.<br>Run SCANDISK or equivalent.                                                                                              |
| 0210h                    | CRC (Cyclic Redundancy Check) or ECC data error.                                                                    | Rerun the test.<br>Run SCANDISK or equivalent.                                                                                              |
| 0211h                    | ECC (Error Checking and Correction)-corrected data error.                                                           | Rerun the test.<br>Run SCANDISK or equivalent.                                                                                              |
| 0220h                    | Controller failure.                                                                                                 | Exchange OmniBook Sojourn.                                                                                                                  |
| 0240h                    | SEEK operation failed.                                                                                              | Exchange OmniBook Sojourn.                                                                                                                  |
| 0280h                    | Drive not ready.                                                                                                    | Exchange OmniBook Sojourn.                                                                                                                  |
| 0281h                    | All Sectors in Test Cylinder are bad.                                                                               | Exchange OmniBook Sojourn.                                                                                                                  |
| 02AAh                    | Drive not ready.                                                                                                    | Exchange OmniBook Sojourn.                                                                                                                  |
| 02CCh                    | Bit 5 (write error bit) of the hard disk controller status register is set on completion of a write operation.      | Exchange OmniBook Sojourn.                                                                                                                  |
| 02EEh                    | The Performance test was run on a drive with less than 200 cylinders.                                               | For the performance test, run BIOS Setup and temporarily select a drive type that has more than 200 cylinders.                              |
| 02F1h -                  | Error reading partition table or no valid partition.                                                                | Recreate the Hibernation partition, then run FDISK to partition the hard disk.                                                              |
| 02F2h                    | Disk data read/write error. The data pattern written to the disk and the data read back from the disk do not match. | Run FDISK to make one partition active. If necessary, recreate the Hibernation partition, then run FDISK to partition the hard disk.        |
| 02F3h                    | Partitions are overlapping.                                                                                         | Run FDISK to check for overlapping partitions. If necessary, recreate the Hibernation partition, then run FDISK to partition the hard disk. |
| 02F4h                    | Boot Sector bootstrap pgm incorrect or virus infection.                                                             | Check for presence of a boot sector virus. If necessary, recreate the Hibernation partition, then run FDISK to partition the hard disk.     |
| 02F5h                    | Media descriptor is invalid.                                                                                        | Reformat the partition.                                                                                                                     |
| 02F6h                    | Total sector number in partition table and boot sector differ.                                                      | Recreate the Hibernation partition, then run FDISK to partition the hard disk.                                                              |
| 02FFh                    | Disk data read/write error.                                                                                         | Exchange OmniBook Sojourn.                                                                                                                  |
| <b>Floppy Disk Tests</b> |                                                                                                                     |                                                                                                                                             |
| 0301h                    | Undefined or invalid command.                                                                                       | Exchange OmniBook Sojourn.                                                                                                                  |
| 0302h                    | Address mark not found.                                                                                             | Run BIOS Setup and check the floppy drive type.                                                                                             |

|                         |                                                                       |                                                                                                                                                |
|-------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
|                         |                                                                       | If test still fails, exchange multimedia slice.                                                                                                |
| 0303h                   | Disk is write-protected.                                              | Insert a floppy disk without write protection.                                                                                                 |
| 0304h                   | Requested sector not found.                                           | Run BIOS Setup and check the floppy drive type.<br>If test still fails, exchange OmniBook Sojourn.                                             |
| 0305h                   | Reset failed.                                                         | Exchange multimedia slice.                                                                                                                     |
| 0307h                   | Drive parameter activity failed.                                      | Run BIOS Setup and check the floppy drive type.<br>If test still fails, exchange multimedia slice.                                             |
| 0308h                   | DMA Overrun error.                                                    | Transient DMA error. Rerun the test.<br>If test still fails, exchange multimedia slice.                                                        |
| 0309h                   | Attempt to DMA at 64 KB boundary                                      | Transient DMA error. Rerun the test.                                                                                                           |
| 030Ah                   | Bad sector flag detected.                                             | Rerun the test with a good floppy disk.<br>If test still fails, exchange multimedia slice.                                                     |
| 0310h                   | CRC or ECC data error.                                                | Rerun the test with a good floppy disk.<br>If test still fails, exchange multimedia slice.                                                     |
| 0311h                   | ECC-corrected data error.                                             | Rerun the test with another floppy disk.                                                                                                       |
| 0321h                   | Change line not working.                                              | Exchange multimedia slice.                                                                                                                     |
| 0322h                   | Floppy speed error disk.                                              | Exchange multimedia slice.                                                                                                                     |
| 0340h                   | Seek operation failed. An attempt to perform a seek operation failed. | Exchange multimedia slice.                                                                                                                     |
| 0380h                   | Drive not ready.                                                      | Make sure the floppy disk is fully inserted and rerun test.<br>If test still fails, exchange multimedia slice.                                 |
| 03AAh                   | Drive not ready.                                                      | Make sure the floppy disk is fully inserted and rerun test.<br>If test still fails, exchange multimedia slice.                                 |
| 03CCh                   | Write fault on selected drive.                                        | Run BIOS Setup and check the floppy drive type.<br>Rerun the test with another floppy disk.<br>If test still fails, exchange multimedia slice. |
| 03EEh                   | Data write/data read mismatch.                                        | Rerun the test with another floppy disk.<br>If test still fails, exchange multimedia slice.                                                    |
| 03FFh                   | Diskette data read/write error.                                       | Rerun the test with another floppy disk.<br>If test still fails, exchange multimedia slice.                                                    |
| <b>Keyboard Tests</b>   |                                                                       |                                                                                                                                                |
| 0400h                   | Keyboard controller interface error.                                  | Exchange OmniBook Sojourn.                                                                                                                     |
| 0401h                   | Improper responses to the keyboard controller commands.               | Exchange OmniBook Sojourn.                                                                                                                     |
| 0410h - 0411h           | Keyboard clock line is stuck low/high.                                | Exchange OmniBook Sojourn.                                                                                                                     |
| 0412h - 0413h           | Keyboard data line is stuck low/high.                                 | Exchange OmniBook Sojourn.                                                                                                                     |
| 0414h                   | No response or improper response to command to the keyboard.          | Exchange OmniBook Sojourn.                                                                                                                     |
| 0415h                   | Keyboard LED could not be turned on.                                  | Exchange OmniBook Sojourn.                                                                                                                     |
| 0416h                   | Keyboard diagnostic echo failed.                                      | Exchange OmniBook Sojourn.                                                                                                                     |
| 0417h                   | Keyboard is not responding to command.                                | Exchange OmniBook Sojourn.                                                                                                                     |
| 0418h                   | Keyboard user prompt = failed.                                        | Exchange OmniBook Sojourn.                                                                                                                     |
| <b>Serial Port Test</b> |                                                                       |                                                                                                                                                |
| 0601h                   | Data read back from the port xxxh was                                 | For the external loopback test, make sure                                                                                                      |



|                           |                                                                            |                                                                                                                                                                                |
|---------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                           | different from data written to port.                                       | the loopback connector is installed and constructed properly.<br>If test still fails, exchange OmniBook Sojourn or multimedia slice.                                           |
| 0602h                     | Interrupt identification register test failed.                             | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0603h                     | Data read back from the port xxxh was different from data written to port. | For the external loopback test, make sure the loopback connector is installed and constructed properly.<br>If test still fails, exchange OmniBook Sojourn or multimedia slice. |
| 0604h                     | Line status register test failed at port xxxh.                             | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0605h                     | Interrupt activation test failed at port xxxh.                             | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0606h                     | Data transfer test failed at port xxxh.                                    | For the external loopback test, make sure the loopback connector is installed and constructed properly.<br>If test still fails, exchange OmniBook Sojourn or multimedia slice. |
| 0607h                     | Loop back test failed at port xxxh.                                        | For the external loopback test, make sure the loopback connector is installed and constructed properly.<br>If test still fails, exchange OmniBook Sojourn or multimedia slice. |
| 0608h                     | FIFO register test failed.                                                 | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0609h                     | FIFO register test failed.                                                 | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0610h                     | FIFO trigger level error.                                                  | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0611h                     | FIFO test error.                                                           | Exchange OmniBook Sojourn.                                                                                                                                                     |
| <b>Parallel Port Test</b> |                                                                            |                                                                                                                                                                                |
| 0701h                     | Data read back from the port xxxh was different from data written to port. | For the external loopback test, make sure the loopback connector is installed and constructed properly.<br>If test still fails, exchange OmniBook Sojourn or multimedia slice. |
| 0702h                     | The IRQ activation test failed at port xxxh.                               | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0703h                     | No response from printer.                                                  | Run BIOS Setup and disable ECP for the parallel port, then rerun the test.<br>If test still fails, exchange OmniBook Sojourn.                                                  |
| 0704h                     | ECP register W/R failed at port xxxh.                                      | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0705h                     | ECP FIFO test failed at port xxxh.                                         | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0706h                     | LPT data port test failed.                                                 | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0707h                     | Loopback test failed at port xxxh.                                         | For the external loopback test, make sure the loopback connector is installed and constructed properly.<br>If test still fails, exchange OmniBook Sojourn or multimedia slice. |
| 0708h                     | Non-expected data in the loopback circuit.                                 | Exchange OmniBook Sojourn.                                                                                                                                                     |
| <b>Audio Test</b>         |                                                                            |                                                                                                                                                                                |
| 0801h - 0804h             | Sound test failed.                                                         | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0810h                     | Speaker test failed.                                                       | Exchange OmniBook Sojourn.                                                                                                                                                     |
| 0812h                     | Sound test failed.                                                         | Exchange OmniBook Sojourn.                                                                                                                                                     |
| <b>Video Test</b>         |                                                                            |                                                                                                                                                                                |
| 0900h                     | Video adapter memory read or write test failed.                            | Exchange OmniBook Sojourn.                                                                                                                                                     |

|                                        |                                                                                                                  |                                                                                                                                                                                                        |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0901h                                  | Video adapter attribute test failed.                                                                             | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0903h                                  | 80 x 25 video display test failed.                                                                               | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0904h                                  | 40 x 25 video display test failed.                                                                               | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0905h                                  | 320 x 200 graphics test failed.                                                                                  | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0906h                                  | 640 x 200 graphics test failed.                                                                                  | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0907h                                  | Video memory page selection test failed.                                                                         | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0908h                                  | Video adapter color test failed.                                                                                 | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 0909h                                  | 640 x 350 graphics test failed.                                                                                  | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 090Ah                                  | 640 x 480 graphics test failed.                                                                                  | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 090Ch                                  | VESA video mode test failed.                                                                                     | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 090Dh                                  | VESA video memory test failed.                                                                                   | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 090Eh                                  | DDC1 protocol failed.                                                                                            | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 090Fh                                  | DDC2 protocol failed.                                                                                            | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| <b>CD-ROM Tests</b>                    |                                                                                                                  |                                                                                                                                                                                                        |
| 0A00h                                  | No CD in drive.                                                                                                  | Insert a CD in the drive.                                                                                                                                                                              |
| 0A01h                                  | Eject fails on drive.                                                                                            | Manually eject CD.                                                                                                                                                                                     |
| 0A02h                                  | Close failed on drive.                                                                                           | Manually close CD.                                                                                                                                                                                     |
| 0A03h                                  | Data test failed.                                                                                                | Insert a different CD in the drive and rerun the test.<br>If test still fails, exchange multimedia slice.                                                                                              |
| 0A04h                                  | Play test failed.                                                                                                | Insert a different CD in the drive and rerun the test.<br>If test still fails, exchange multimedia slice.                                                                                              |
| 0A05h                                  | No data CD in drive.                                                                                             | Insert a computer CD in the drive.                                                                                                                                                                     |
| 0A06h                                  | No audio CD in drive.                                                                                            | Insert an audio CD in the drive.                                                                                                                                                                       |
| <b>USB Tests</b>                       |                                                                                                                  |                                                                                                                                                                                                        |
| 1301h                                  | Cannot find PCI resource.                                                                                        | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 1302h                                  | Register test failed.                                                                                            | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 1303h                                  | Frame test failed.                                                                                               | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 1304h                                  | Status test failed.                                                                                              | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 1305h                                  | Interrupt test failed.                                                                                           | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 1306h                                  | Transfer description failed.                                                                                     | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| <b>OmniBook IR Tests (FIR enabled)</b> |                                                                                                                  |                                                                                                                                                                                                        |
| 9002h                                  | Can't find the PIIX4 chip.                                                                                       | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 9007h                                  | SIR: Tx empty interrupt did not happen.<br>MIR/FIR: Tx DMA did not generate an interrupt.                        | Exchange OmniBook Sojourn.<br>Exchange OmniBook Sojourn.                                                                                                                                               |
| 9008h                                  | Rx DMA w/o interrupts failed (wrong # bytes, bad bytes). MIR/FIR only.                                           | Exchange OmniBook Sojourn.                                                                                                                                                                             |
| 9009h                                  | Tried to run the test in Windows (must exit to DOS). No successful transmits. Internal loopback errors occurred. | Do not run this test in Windows. For the two-unit test, make sure the IR ports on the reflector and test OmniBooks are lined up.<br>Rerun the test.<br>If test still fails, exchange OmniBook Sojourn. |
| 900Ah                                  | Bad packet received or no packet at all: rear IR port.                                                           | Make sure the IR ports on the reflector and test OmniBooks are lined up and rerun the test.<br>If test still fails, exchange OmniBook Sojourn.                                                         |

|       |                      |                                                                                                                                                                           |
|-------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 900Ch | No packets received. | <p>Make sure the IR ports on the reflector and test OmniBooks are lined up. Restart the reflector unit.</p> <p>Rerun the test.</p> <p>Exchange front OmniBook Sojourn</p> |
|-------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## BIOS Setup Utility

The BIOS Setup utility provides access to basic configuration settings. It is independent of the operating system.

### Running the BIOS Setup Utility

1. Close all applications, then shut down Windows and reboot the OmniBook.
2. When you see the HP logo, press F2 to enter the BIOS Setup utility.
3. The touch pad or mouse is not active in the Setup utility. Press the RIGHT and LEFT arrow keys to move among menus. Press the DOWN and UP arrow keys to move among parameters in a menu. Press ENTER to change a setting. See the tables below for more information.
4. After you select the options you want, press F10 to exit the Setup utility.

**Table 3-6. BIOS Setup Menus and Parameters**

| Main Menu              | Description                                                                                       | Default          |
|------------------------|---------------------------------------------------------------------------------------------------|------------------|
| System Time            | Sets the time using 24-hour format.                                                               | 00:00:00         |
| System Date            | Specify a time when the system is to wake up.                                                     | 00/00/0000       |
| Legacy Diskette A      | Sets the floppy drive type.                                                                       | 1.44/1.25 MB     |
| Primary Master         | Sets parameters of drive attached to primary IDE adapter (hard disk drive).                       | 2.1 GB HDD       |
| Secondary Master       | Sets parameters of drive attached to secondary IDE adapter (CD-ROM).                              | CD-ROM           |
| Boot Options           | Selects the order the system searches drives for a boot disk.                                     | A: then C:       |
| OS Legacy Mode Support | Select "Yes" if using a plug-and-play operating system such as Windows 95, otherwise select "No". | Yes              |
| Numlock                | Selects power-on state for Numlock.                                                               | Off              |
| Memory Cache           | Sets the CPU memory cache.                                                                        | Enabled          |
| System Memory          | Shows the system memory size.                                                                     | 640 KB           |
| Extended Memory        | Shows the extended memory size.                                                                   | 64512 KB         |
| CPU Type               | Shows the CPU type.                                                                               | Pentium with MMX |
| CPU Speed              | Shows the CPU speed.                                                                              | 233 Mhz          |

| Advanced Menu            | Description                                                                                         | Default               |
|--------------------------|-----------------------------------------------------------------------------------------------------|-----------------------|
| I/O Device Configuration |                                                                                                     |                       |
| Serial Port A            | Configures serial port A                                                                            | Auto                  |
| Serial Port B<br>Mode    | Configures serial port B.<br>Set mode (Normal, IrDA, ASK-IR, or FIR) for serial port B.             | Disabled<br>Normal    |
| Parallel Port<br>Mode    | Configures parallel port.<br>Sets mode (Output Only, bidirectional, ECP, or EPP) for parallel port. | Auto<br>Bidirectional |
| Floppy Disk Controller   | Configures floppy disk controller.                                                                  | Enabled               |
| Large Disk Access Mode   | UNIX, Novell Netware, or other operating systems, select "Other."                                   | DOS                   |
| Local Bus IDE adapter    | Enables local bus IDE adapter.                                                                      | Both                  |

| Security Menu           | Description                                                                                                   | Default    |
|-------------------------|---------------------------------------------------------------------------------------------------------------|------------|
| User Password Is        | Shows if a user password is set.                                                                              | Clear      |
| Supervisor Password Is  | Shows if a supervisor password is set.                                                                        | Clear      |
| Set User Password       | Press ENTER to set, change, or clear the password and save all Setup changes. (Up to 8 alphanumeric keys).    |            |
| Set Supervisor Password | Press ENTER to set, change, or clear the password and save changes                                            |            |
| Password on Boot        | Required a password to boot.                                                                                  | Disabled   |
| Diskette Access         | Restricts floppy drive use to supervisor. Requires setting Supervisor password and enabling Password On Boot. | Supervisor |
| Fixed Disk Boot Sector  | Write protects boot sector on hard disk to protect against viruses.                                           | Normal     |

| Power Saving          | Description                                                                                                | Default              |
|-----------------------|------------------------------------------------------------------------------------------------------------|----------------------|
| Switch Button         | Sets the Switch Button to Suspend/Resume or to On/Off.                                                     | Suspend/Resume       |
| Power Management      | Disables time-outs, selects a combination of time-outs, or allows customized time-outs.                    | Maximum Power Saving |
| Idle Mode             | Turns Idle mode on and off. Idle mode slows down the CPU during brief periods when the system is not busy. | On                   |
| Standby Time-out      | Sets the period of inactivity after which the OmniBook goes from Idle to Standby power mode.               | 1 minute             |
| Suspend Mode          | Sets the type of Suspend mode to Suspend-to-RAM or Save-to-Disk.                                           | Save To Disk         |
| Auto Suspend Time-out | Sets the period of inactivity after which the OmniBook goes from Standby to Suspend mode.                  | 5 minutes            |
| Hard Disk Time-out    | Sets the period of hard disk inactivity after which the hard disk stops spinning.                          | 1 minute             |
| Video Time-out        | Turns off the OmniBook screen after the set period of inactivity.                                          | 4 minutes            |
| Resume on Modem Ring  | When enabled, sets the system to resume when receiving a ring signal.                                      | Off                  |
| Resume on Time        | When enabled, sets the system to resume at Resume Time specified.                                          | Off                  |
| Resume Time           | Specify a time when the system is to resume (24-hour time format).                                         | 00:00:00             |
| Resume Date           | Specify a date when the system is to resume (mm/dd/yyyy format).                                           | 00/00/0000           |

| Exit Menu               | Description                                                 | Default |
|-------------------------|-------------------------------------------------------------|---------|
| Exit Saving Changes     | Saves Setup changes, exits, and reboots.                    | none    |
| Exit Discarding Changes | Discards Setup changes since last save, exits, and reboots. | none    |
| Load Setup Defaults     | Restores all default settings, and stays in Setup.          | none    |
| Discard Changes         | Discards Setup changes since last save, and stays in Setup. | none    |
| Save Changes            | Saves Setup changes, and stays in Setup.                    | none    |

---

## To change the keyboard layout

If the keys do not type the characters marked on them, the wrong keyboard layout may be selected.

- To change the setting in Windows 95, select Control Panel, Keyboard, Language tab, Properties, Keyboard Layout. Change the selection in the field.
- To effect the change in DOS, you must edit the AUTOEXEC.BAT and CONFIG.SYS files. To select the British keyboard layout, un-comment (remove the REM commands) from the two lines that activate the British keyboard. To select the United States 101 keyboard layout, delete the two command lines that activate the British keyboard.



## Reference Information

---

This chapter includes the following reference information:

- Password removal policy.
- TFT display quality statement.
- Replaceable parts list.

---

### Password Removal Policy

If the user forgets the system password, the user must return the OmniBook Sojourn to a service center for password removal. The user must provide proof of ownership.

The password removal procedure is protected as HP Company Private information. There are a restricted number of locations that can perform password removal. It may not be disclosed or distributed outside those locations.

Password removal is strictly controlled. Hewlett-Packard and authorized support providers must ensure with written evidence that the user returning the OmniBook to be “cleansed” is actually the property of the unit’s actual and current owner. This requires a sales receipt showing the unit serial number and owner’s name, or a written statement from the owner attesting that he or she is the owner of the unit. The statement can be a fax copy of the document. The fact that the unit is in the hands of an HP representative on behalf of the customer is not evidence of ownership. In addition, HP will not remove the password of a unit for any non-owner, even if it is requested by law enforcement agencies. If you receive such a request, you should notify management and HP Corporate Legal immediately. (These requests may require a court order prior to our participation.)

Further, the entity removing the password must log the name, serial number and date of the removal, and file the written backup with the log. The log and backup are subject to standard record retention process and review.

The final issue relating to removal of passwords is that HP cannot provide information to users that would assist them in improperly removing a password and opening a unit.



---

## Hewlett-Packard TFT Display Quality Statement

TFT display manufacturing is a high-precision but imperfect technology, and manufacturers cannot currently produce large displays that are cosmetically perfect. Most, if not all, TFT displays will exhibit some level of cosmetic imperfection. These cosmetic imperfections may be visible to the customer under varying display conditions and can appear as bright, dim, or dark spots. This issue is common across all vendors supplying TFT displays in their products and is not specific to the HP OmniBook display.

HP OmniBook TFT displays meet or exceed all TFT manufacturer's standards for cosmetic quality of TFT displays. HP does not warrant that the displays will be free of cosmetic imperfections. TFT displays may have a small number of cosmetic imperfections and still conform to the display manufacturer's cosmetic quality specifications.

Here are some guidelines to use in determining what action to take on customers' complaints of cosmetic imperfections in their TFT displays:

1. The unit should be viewed in the customer's normal operating condition.

This means if the customer uses the unit predominately in DOS, in Windows, or in some other application or combination of applications, that is where you should make the determination. Self test is not a normal operating condition and is not a sufficient tool to interpret display quality.

2. Use the table below to determine whether the display should be considered defective.
3. If a OmniBook Sojourn is considered for replacement because of display defects, it should be clear to the customer that cosmetic variations on the replacement display may also exist, and may require the customer to use a work-around to obscure the cosmetic imperfection.
4. Customers with cosmetic-based complaints only, which do not conform to the above conditions and tests, will not normally be considered for OmniBook Sojourn replacement. It will be left to the judgment of the HP-responsible person working with the customer, to identify work-arounds that are reasonable and appropriate for the individual customer

We expect over time that the industry will continue to improve in its ability to produce displays with fewer inherent cosmetic imperfections, and we will adjust our HP guidelines as the improvements are implemented.

**Table 4-1. OmniBook Sojourn TFT XGA Display Quality Guidelines**

| Type of Imperfection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Imperfections Not Allowed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical Imperfections:<br>Bright dots (a)<br>Dark dots (a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 9 or more single bright dots.<br>3 or more occurrences of double (two vertically adjacent) bright dots.<br>3 or more occurrences of two single or double bright dots within 15 mm.<br>9 or more single or double dark dots.<br>3 or more occurrences of double (two vertically adjacent) dark dots.<br>3 or more occurrences of two single or double dark dots within 15 mm.<br>Any occurrence of 3 or more vertically adjacent bright dots.<br>Any occurrence of 3 or more vertically adjacent dark dots. |
| Mechanical Imperfections:<br>Spots (b)<br>Lines (c)<br>Polarizer scratches (d)<br>Polarizer dents, bubbles (e)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6 or more spots 0.25-0.5 mm avg. dia.<br>6 or more lines 1.0-10 mm long and 0.01-0.05 mm wide.<br>6 or more dents or bubbles 0.25-0.5 mm avg. dia.<br>Any spot over 0.5 mm dia.<br>Any line over 10 mm long or 0.05 mm wide.<br>Any scratch noticeable from 30 cm (12 in) under normal office lighting.<br>Any dent or bubble over 0.5 mm avg. dia.                                                                                                                                                        |
| Definitions of imperfections:<br><sup>a</sup> Bright or dark dot: A subpixel (red, green, or blue dot) that is stuck on or off.<br><sup>b</sup> Spot: A point on the display that appears dark or bright and does not change in size. Caused by foreign circular matter on the backlight.<br><sup>c</sup> Line: A line on the display that appears dark or light, and does not change in size. Caused by contamination (lint, hair) behind the display.<br><sup>d</sup> Polarizer scratch: A light line that is visible on a darker background and does not change in size.<br><sup>e</sup> Polarizer dent or bubble: A light spot with a darker border that appears on a lighted display and does not change in size. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

---

## OmniBook Sojourn Replaceable Parts

**Table 4-2. OmniBook Sojourn Replaceable Parts List**

| Part Number                              | Exchange Part Number | Description                |
|------------------------------------------|----------------------|----------------------------|
| F1430-60901                              | F1430-69001          | OmniBook Sojourn           |
| F1430-60902                              | CREW*                | Recovery CD-ROM            |
| F1431-60901                              | F1431-69001          | Multimedia Slice           |
| F1432-60901                              | F1432-69001          | Battery, Internal          |
| F1433-60901                              | F1433-69001          | Enhanced Battery Slice     |
| F1430-60905                              | CREW                 | Additional ac adapter      |
| F1430-60909                              | CREW                 | Auto/airline power adapter |
| * Customer Replaceable End User Warranty |                      |                            |



- 1. Product Information**
- 2. Battery Replacement**
- 3. Troubleshooting and Diagnostics**
- 4. Reference Information**